


# Universal push button dimmer 3 - 300 W, 2 wire


Dimmer for incandescent lamps, 230 V halogen lamps, all low-voltage halogen lamps and dimmable LED lamps. Connected with 2-wire system.

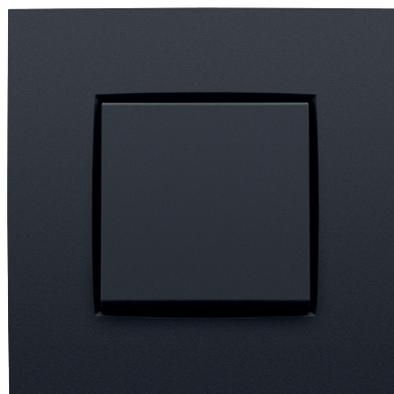

## Universal push button dimmer 3 - 300 W, 2 wire

Dimmer for incandescent lamps, 230 V halogen lamps, all low-voltage halogen lamps and dimmable LED lamps. Connected with 2-wire system.

- for use with or without light value memory
- for use with several control points, use N.O. push buttons, also when replacing single-pole, two-way or intermediate switches
- power supply voltage: 230 Vac  $\pm$  10%, 50 Hz
- incandescent lamps: 3 - 300 W
- 230 V halogen lamps: 3 - 300 W
- dimmable LED lamps: 3 - 200 W (maximum number of lamps will depend on the used lamp type)
- ferromagnetic transformer: 20 - 300 VA
- toroidal core transformer: 20 - 300 VA
- electronic transformer: 20 – 300 VA
- minimum load: 3 W
- maximum load: 300 W
- overload protection with automatic reset function
- electronic short-circuit protection
- powerline communication interference suppression
- power consumption standby: 0.15 W
- connection terminals: 2 x 2.5 mm<sup>2</sup>
- ambient temperature: 35 °C



### BASE



**310-02900** Pieces: 6 With screw terminals and claw fixing



**310-02901** Pieces: 6 With screw terminals, for screw fixing

### FINISHING SET





	<b>100-31002</b>	Pieces: 10		<b>101-31002</b>	Pieces: 10		<b>102-31002</b>	Pieces: 10
	<b>104-31002</b>	Pieces: 10		<b>121-31002</b>	Pieces: 10		<b>122-31002</b>	Pieces: 10
	<b>123-31002</b>	Pieces: 10		<b>124-31002</b>	Pieces: 10		<b>154-31002</b>	Pieces: 10
	<b>157-31002</b>	Pieces: 10		<b>161-31002</b>	Pieces: 10		<b>200-31002</b>	Pieces: 10
	<b>220-31002</b>	Pieces: 10		<b>221-31002</b>	Pieces: 10			

# 310-02900

4 year warranty

## Base for universal push button dimmer PLC interference suppression 3-300 W, 2 wire

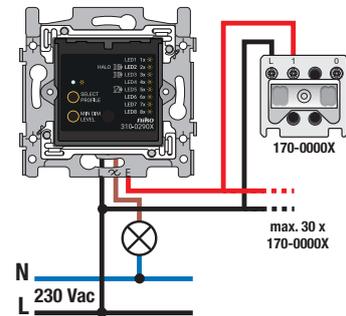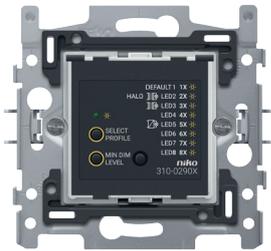

Base for a universal push button dimmer with powerline communication interference suppression, 2-wire connected with a capacity of 3-300 W. A finishing set XXX-31002 and faceplate in a colour of your choice should be ordered separately.

Base for universal push button dimmer PLC interference suppression 3-300 W, 2 wire. Universal flush-mounting dimmer with rotary control for capacitive, inductive and resistive loads, including dimmable LED lamps. Reverse phase control for resistive and capacitive loads. Phase control for inductive loads. Activate by pressing on the button and adjust by rotating the knob. Can be used in single-pole circuits. When used in two-way or intermediate circuits, the two-way or intermediate switch needs to be replaced by one or more push button extensions (170-0000x) that are wired to this dimmer as indicated in the manual or technical catalogue. Use with or without memory, can be set using the push button input. Minimum dimming level can be set for an optimum dimming range and the avoidance of the flickering or extinguishing of lamps at the minimum dimming level. Non-volatile memory. For use with or without light value memory.


The sockets are equipped with screw terminals for clamping the wires. When mounting in a flush-mounting box with grip surfaces, use claws that can be rotated open using screws with a slotted screwhead (slot 0.8 x 5 mm). The claws, which have a depth of engagement of 31 mm, turn back completely when loosened. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. The flush-mounting frame is equipped, both on the top and the bottom, with a dark grey, plastic end border. This border is made of PC+ASA and is joined to the flush-mounting frame using a melting process. The corners of the two end borders are equipped with rectangular openings (7.9 x 1.5 mm) each containing a multi-positional snap hook. Thanks to the snap hooks, the 4 rectangular openings ensure that the faceplate can always be attached flat to the wall, even in cases of untidy plasterwork. This works in two directions: If the flush-mounting box sticks out of the plasterwork, the multi-positional snap hooks can compensate for a 1 to 1.2 mm margin; if the flush-mounting box is sunk too deeply in the plasterwork, the snap hooks can compensate for up to a 1.8 mm margin. The end borders also have 4 round openings that ensure the correct positioning of the faceplate in relation to the central plate.

Wire capacity	2 x 2.5 mm <sup>2</sup> per connection terminal
Input voltage	230 Vac ± 10 %, 50 Hz
Minimum load	3 W
Maximum load 230V-halogen lamps	300 W
Maximum load electronic transformer	300 VA
Maximum load ferromagnetic transformer	300 VA
Maximum load bulb	300 W
Maximum load LED lamps	200 W (lamp type determines the maximum number of lamps)
Maximum load toroidal core transformer	300 VA
Hum-free	yes
PLC interference suppression	this dimmer is equipped with interference suppression of PLC signals (frequency dips up to 3 Hz). This integrated interference suppression attempts to remove as many interfering signals as possible from the mains in order for most lamps to function optimally, without flashing or humming.
Protection from overload	thermal overload protection. Protection against repetitive overload. Automatic reset function of the protections.
Short circuit proof	electronic short-circuit protection
Connection terminals	3 connection terminals
Ambient temperature	-5 – +40 °C
Protection degree	The combination of a mechanism, a central plate and a faceplate has a protection degree of IP41
Flush-mounting depth	40 mm minimum depth of the flush-mounting box
Marking	CE

# 310-02901

4 year warranty

## Base for universal push button dimmer PLC interference suppression 3-300 W, 2 wire

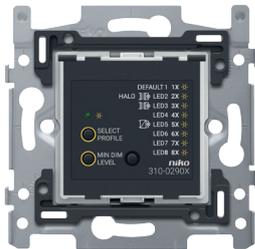

Base for a universal push button dimmer with powerline communication interference suppression, 2-wire connected with a capacity of 3-300 W. A finishing set XXX-31002 and faceplate in a colour of your choice should be ordered separately.

Base for universal push button dimmer PLC interference suppression 3-300 W, 2 wire. Universal flush-mounting dimmer with rotary control for capacitive, inductive and resistive loads, including dimmable LED lamps. Reverse phase control for resistive and capacitive loads. Phase control for inductive loads. Activate by pressing on the button and adjust by rotating the knob. Can be used in single-pole circuits. When used in two-way or intermediate circuits, the two-way or intermediate switch needs to be replaced by one or more push button extensions (170-0000x) that are wired to this dimmer as indicated in the manual or technical catalogue. Use with or without memory, can be set using the push button input. Minimum dimming level can be set for an optimum dimming range and the avoidance of the flickering or extinguishing of lamps at the minimum dimming level. Non-volatile memory. For use with or without light value memory.

The sockets are equipped with screw terminals for clamping the wires. When fixing in a flush-mounting box screws should be used. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. The flush-mounting frame is equipped, both on the top and the bottom, with a dark grey, plastic end border. This border is made of PC+ASA and is joined to the flush-mounting frame using a melting process. The corners of the two end borders are equipped with rectangular openings (7.9 x 1.5 mm) each containing a multi-positional snap hook. Thanks to the snap hooks, the 4 rectangular openings ensure that the faceplate can always be attached flat to the wall, even in cases of untidy plasterwork. This works in two directions: If the flush-mounting box sticks out of the plasterwork, the multi-positional snap hooks can compensate for a 1 to 1.2 mm margin; if the flush-mounting box is sunk too deeply in the plasterwork, the snap hooks can compensate for up to a 1.8 mm margin. The end borders also have 4 round openings that ensure the correct positioning of the faceplate in relation to the central plate.

Wire capacity	2 x 2.5 mm <sup>2</sup> per connection terminal
Input voltage	230 Vac ± 10 %, 50 Hz
Minimum load	3 W
Maximum load 230V-halogen lamps	300 W
Maximum load electronic transformer	300 VA
Maximum load ferromagnetic transformer	300 VA
Maximum load bulb	300 W
Maximum load LED lamps	200 W (lamp type determines the maximum number of lamps)
Maximum load toroidal core transformer	300 VA
Hum-free	yes
PLC interference suppression	this dimmer is equipped with interference suppression of PLC signals (frequency dips up to 3 Hz). This integrated interference suppression attempts to remove as many interfering signals as possible from the mains in order for most lamps to function optimally, without flashing or humming.
Protection from overload	thermal overload protection. Protection against repetitive overload. Automatic reset function of the protections.
Short circuit proof	electronic short-circuit protection
Connection terminals	3 connection terminals
Ambient temperature	-5 – +40 °C
Protection degree	The combination of a mechanism, a central plate and a faceplate has a protection degree of IP41
Flush-mounting depth	40 mm minimum depth of the flush-mounting box
Marking	CE