


Connected double switch, 2 x 10 A (total max. 16 A)

The connected double switch has a switching contact to switch lighting. It contains a transmitter and receiver that can communicate wirelessly with the wireless smart hub for Niko Home Control. You can use the connected double switch to replace a conventional switch. It is equipped with an extension terminal so that, in combination with a conventional push button, it can easily replace multiway or intermediate switching.

The connected double switch can switch its own contact.

Once the wireless smart hub for Niko Home Control has been added, it is possible to configure additional functionalities with the Niko Home Control programming software. That way, it is possible to connect these in a mood or all-off function and much more.

It is possible to disconnect the control from its built-in contact. That way, you have complete flexibility to configure the switching contact and the controls separately via the programming software.

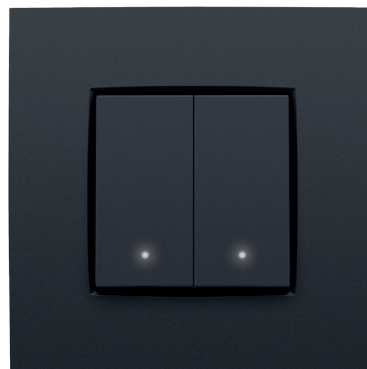

Connected double switch, 2 x 10 A (total max. 16 A)

The connected double switch has a switching contact to switch lighting. It contains a transmitter and receiver that can communicate wirelessly with the wireless smart hub for Niko Home Control.


You can use the connected double switch to replace a conventional switch. It is equipped with an extension terminal so that, in combination with a conventional push button, it can easily replace multiway or intermediate switching.

The connected double switch can switch its own contact.

Once the wireless smart hub for Niko Home Control has been added, it is possible to configure additional functionalities with the Niko Home Control programming software. That way, it is possible to connect these in a mood or all-off function and much more.

It is possible to disconnect the control from its built-in contact. That way, you have complete flexibility to configure the switching contact and the controls separately via the programming software.

- power supply: 230 Vac (L- + N-wire required)
- max. load per channel: 10 A
- max. load both channels: 16 A
- communication protocol: Easywave Sharp
- mounting method: wall mounting
- mounting height: 110 - 120 cm
- modification of settings: Niko Home Control programming software (requires smart hub 552-00001)
- maximum range (from switch to smart hub): 30 m
- operating frequency: 869,05 Mhz
- maximum frequency power: 6 dBm
- LED colour: white
- protection degree: IP20
- flush-mounting depth: 40 mm
- ambient temperature: 0 – +40 °C
- marking: CE



BASE



551-72102 Pieces: 6 For claw fixing, centre distance 60 mm



551-72112 Pieces: 6 For screw fixing, centre distance 71 mm



551-72122 Pieces: 6 For screw fixing, centre distance 60 mm

FINISHING SET WITH LENS



| | | | | | | | | |
|---|------------------|------------|---|------------------|------------|---|------------------|------------|
|  | 100-32004 | Pieces: 10 |  | 101-32004 | Pieces: 10 |  | 102-32004 | Pieces: 10 |
|  | 104-32004 | Pieces: 10 |  | 121-32004 | Pieces: 10 |  | 122-32004 | Pieces: 10 |
|  | 123-32004 | Pieces: 10 |  | 124-32004 | Pieces: 10 |  | 154-32004 | Pieces: 10 |
|  | 157-32004 | Pieces: 10 |  | 161-32004 | Pieces: 10 |  | 200-32004 | Pieces: 10 |
|  | 220-32004 | Pieces: 10 |  | 221-32004 | Pieces: 10 | | | |

FINISHING SET




| | | | | | | | | |
|---|------------------|------------|---|------------------|------------|---|------------------|------------|
|  | 100-31004 | Pieces: 10 |  | 101-31004 | Pieces: 10 |  | 102-31004 | Pieces: 10 |
|  | 104-31004 | Pieces: 10 |  | 121-31004 | Pieces: 10 |  | 122-31004 | Pieces: 10 |
|  | 123-31004 | Pieces: 10 |  | 124-31004 | Pieces: 10 |  | 154-31004 | Pieces: 10 |
|  | 157-31004 | Pieces: 10 |  | 161-31004 | Pieces: 10 |  | 200-31004 | Pieces: 10 |
|  | 220-31004 | Pieces: 10 |  | 221-31004 | Pieces: 10 | | | |

551-72102

4 year warranty

Connected double switch, 2 x 10 A (max. 16 A in total) 60 x 71 mm, claw fixing

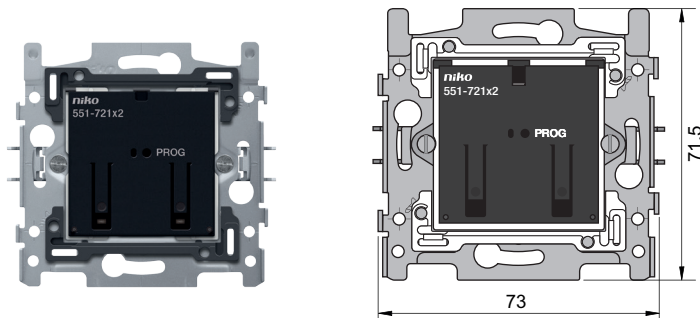

The connected double switch has two switching contacts to switch lighting. It contains a transmitter and receiver that can communicate wirelessly with the wireless smart hub for Niko Home Control.

You can use the connected double switch to replace a conventional switch. It is equipped with two extension terminals so that, in combination with a conventional push button, it can easily replace multiway or intermediate switching. The connected double switch can switch its own contacts.

Once the wireless smart hub for Niko Home Control has been added, it is possible to configure additional functionalities with the Niko Home Control programming software. That way, it is possible to connect these in a mood or all-off function and much more.

It is possible to disconnect the control from its built-in contacts. That way, you have complete flexibility to configure the switching contact and the controls separately via the programming software.

Connected double switch, 2 x 10 A (max. 16 A in total) 60 x 71 mm, claw fixing. All connection terminals can contain up to 2 x 2.5 mm² of wire. When mounting the socket outlet in a flush-mounting box with grip surfaces, use claws that can be rotated open using screws with a combination screwhead (Pz2 or slot 1 x 5.5 mm). The claws, which have an engagement depth of 23.5 mm, turn back completely when loosened. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of 60 x 71 mm by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed.


- Power supply: 230 Vac (L- + N-wire required)
- Protocol: proprietary
- Mounting method: wall mounting
- Mounting height: 110 - 120 cm
- Modification of settings: Niko Home Control programming software (requires smart hub 552-00001)
- Maximum range (from switch to smart hub): 30 m
- Operating frequency: 869,05 Mhz
- Maximum frequency power: 6 dBm
- LED colour: white
- Protection degree: IP20
- Flush-mounting depth: 40 mm
- Ambient temperature: 0 – +40 °C
- Dimensions (HxWxD): 71.5 x 73 x 40 mm
- Marking: CE



551-72112

4 year warranty

Connected double switch, 2 x 10 A (max. 16 A in total) 71 x 71 mm, screw fixing

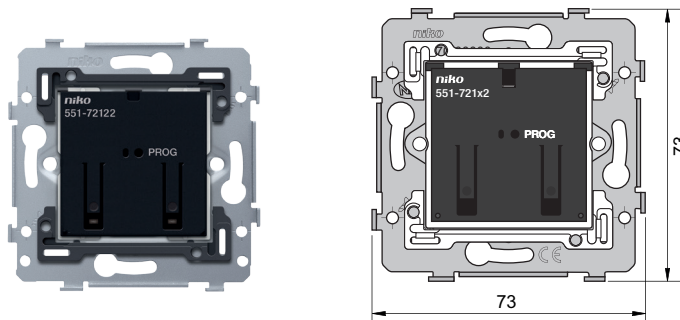

The connected double switch has two switching contacts to switch lighting. It contains a transmitter and receiver that can communicate wirelessly with the wireless smart hub for Niko Home Control.

You can use the connected double switch to replace a conventional switch. It is equipped with two extension terminals so that, in combination with a conventional push button, it can easily replace multiway or intermediate switching. The connected double switch can switch its own contacts.

Once the wireless smart hub for Niko Home Control has been added, it is possible to configure additional functionalities with the Niko Home Control programming software. That way, it is possible to connect these in a mood or all-off function and much more.

It is possible to disconnect the control from its built-in contacts. That way, you have complete flexibility to configure the switching contact and the controls separately via the programming software.

Connected double switch, 2 x 10 A (max. 16 A in total) 71 x 71 mm, screw fixing. All connection terminals can contain up to 2 x 2.5 mm² of wire. When fixing in a flush-mounting box screws should be used. The base is equipped on all sides with folded-up dovetails, allowing for both vertical and horizontal coupling (centre-to-centre distance of 71 x 71 mm) of several bases to be carried out quickly and perfectly. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness.


- Power supply: 230 Vac (L- + N-wire required)
- Protocol: proprietary
- Mounting method: wall mounting
- Mounting height: 110 - 120 cm
- Modification of settings: Niko Home Control programming software (requires smart hub 552-00001)
- Maximum range (from switch to smart hub): 30 m
- Operating frequency: 869,05 Mhz
- Maximum frequency power: 6 dBm
- LED colour: white
- Protection degree: IP20
- Flush-mounting depth: 40 mm
- Ambient temperature: 0 – +40 °C
- Dimensions (HxWxD): 71,5 x 73 x 40 mm
- Marking: CE



551-72122

4 year warranty

Connected double switch, 2 x 10 A (max. 16 A in total) 60 x 71 mm, screw fixing

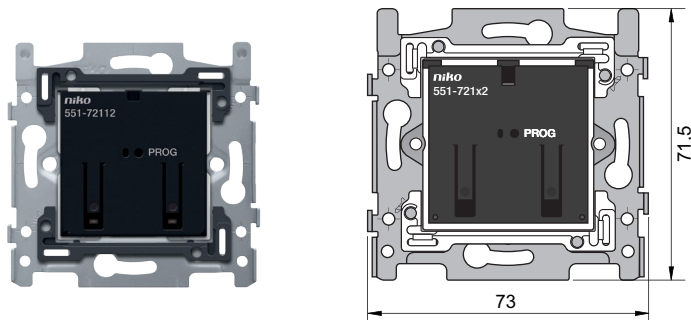

The connected double switch has two switching contacts to switch lighting. It contains a transmitter and receiver that can communicate wirelessly with the wireless smart hub for Niko Home Control.

You can use the connected double switch to replace a conventional switch. It is equipped with two extension terminals so that, in combination with a conventional push button, it can easily replace multiway or intermediate switching. The connected double switch can switch its own contacts.

Once the wireless smart hub for Niko Home Control has been added, it is possible to configure additional functionalities with the Niko Home Control programming software. That way, it is possible to connect these in a mood or all-off function and much more.

It is possible to disconnect the control from its built-in contacts. That way, you have complete flexibility to configure the switching contact and the controls separately via the programming software.

Connected double switch, 2 x 10 A (max. 16 A in total) 60 x 71 mm, screw fixing. All connection terminals can contain up to 2 x 2.5 mm² of wire. When fixing in a flush-mounting box screws should be used. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of 60 x 71 mm by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed.

- Power supply: 230 Vac (L- + N-wire required)
- Protocol: proprietary
- Mounting method: wall mounting
- Mounting height: 110 - 120 cm
- Modification of settings: Niko Home Control programming software (requires smart hub 552-00001)
- Maximum range (from switch to smart hub): 30 m
- Operating frequency: 869,05 Mhz
- Maximum frequency power: 6 dBm
- LED colour: white
- Protection degree: IP20
- Flush-mounting depth: 40 mm
- Ambient temperature: 0 – +40 °C
- Dimensions (HxWxD): 73 x 73 x 40 mm
- Marking: CE

