

# Niko Access Control - flush-mounting camera module with colour camera for flush mounting in existing panels

10-496

4 year warranty

This flush-mounting camera module can be easily mounted in an existing front panel or in a panel of your own design. This camera can be used in combination with the door loudspeaker for flush mounting 10-880-02 and extension 10-881-01.

## Technical data


Niko Access Control - flush-mounting camera module with colour camera for flush mounting in existing panels

can be integrated behind front shields provided by the client - colour camera CCD sensor 380 TVL - manually rotatable through  $\pm 7^\circ$  horiz/vert (in combination with mounting frame 10-896 or 10-896-10) - focal length:  $f = 3, 6 \text{ mm}$  - light sensitivity 0.2lux - diagonal detection angle  $90^\circ$  - recommended mounting height for the camera: 1.6m - video output symmetrical 1 Vss BAS - based on the 6-wire video system of the Niko range Access control - input current:  $I(a) = 0.0\text{mA}$ ,  $I(P) = I(P_{\text{max}}) = 112\text{mA}$  - permissible ambient temperature:  $-20$  to  $50^\circ\text{C}$  - dimensions: H 80 x W 109 x D 35mm

- Marking: CE



## Dimensions

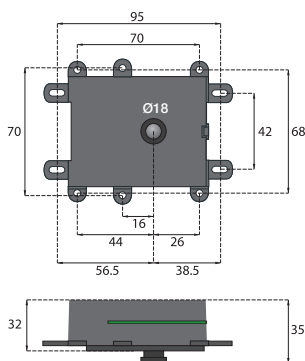

## Wiring diagram

