

Presence detector P48MR, DALI-2, master, 12-13 m, for flush mounting (SnapFit), Wieland gesis® 2 m cable with 5-pol. connector, white

353-651421-3

4 year warranty

This flat and discrete presence detector is a DALI-2 master for DALI lighting control in up to four dimmable zones. Daylight control can be overridden via wireless and battery-free Bluetooth® push buttons. The detector settings can be modified using the Niko detector tool app and 2-way Bluetooth® communication. The SnapFit mounting system guarantees fast and stable installation. The detector is prewired with a cable and a 5-pole female connector that is unique, which helps to avoid installation errors and save time.

Use this P48 DALI-2 master detector to enable the following lighting control solutions in hallways, corridors, offices, classrooms and meeting rooms:

- Human Centric Lighting (HCL)
- tunable white
- four dimmable zones
- scenarios
- control of non-dimmable luminaires externally on the DALI bus with distribution box 353-70816
- multi-zone for a board light/smart board
- master/master link for adjacent areas control

The detection range can be extended with P46 DALI-2 secondary detectors with a 2 meter cable and connector. Mind the maximum guaranteed current on the DALI bus.

Use distribution box 353-70814 to divide the power distribution to the DALI luminaires over two circuit breakers and achieve a higher security of supply.

Finishing colour: white

Compatible secondary detectors: 353-650021, 353-651021-3, 353-652021, 353-750021, 353-751021, 353-751021-3, 353-752021, 353-852011


Compatible controls: 360-21001

This article is protected by at least one patent (application). For more info on patents, see www.niko.eu/innovation.

- Flat and discrete design
- Lighting control in up to 4 zones (daylight controlled)
- Lighting zones can be controlled wirelessly by push buttons
- SnapFit mounting bracket for easy and stable mounting
- Quick cabling using screwless and easily accessible plug-in terminals
- Commissioning using app (iOS/Android) and 2-way Bluetooth® communication
- Supports DALI broadcast (default) and DALI addressable (up to 64 devices)
- Pre-configured functions:
 - adjustable PIR sensitivity (4 levels)
 - auto configuration / orientation light / night mode
 - light scenarios – define and control up to 16 light scenarios
 - wireless communication master-to-master enabling: folding door, lighting control in adjacent areas, unlimited DALI devices (> 64 DALI devices)



Detection range



H	A Walking	B Across	C Towards	D Presence
2.5 m	ø 13 m	ø 11 m	ø 3 m	ø 5 m
3.0 m	ø 12 m	ø 12 m	ø 3 m	ø 5 m

Measured according to EN/IEC63180



Bluetooth®



DALI-2



master



360°



ø 12 m from
a height of
3 m



2 – 3.5 m



flush-
mounting
(SnapFit)

niko

- multi zone for (smart) board lighting
- tunable white using integrated presets or third-party integration
- human centric lighting (24 presets)
- output relay - control HVAC / standby minimization / light (On/Off)
- external relay for HVAC / standby minimization / light (On/Off)
- adjustable turn-on level when daylight control is disabled
- event log keeps track of recent changes
- DALI lighting control can be overridden with a 230 V push button - different options available
- External DALI-2 input devices via DALI bus - up to 64 devices
- External trigger can be connected e.g. security alarm
- Web based portal solution for backing up and exchanging configuration files
- Settings and configuration can be locked with a PIN code
- Suitable for BMS integration

Technical data


Article number	353-651421-3
Compatible secondary detectors	353-650021, 353-651021-3, 353-652021, 353-750021, 353-751021, 353-751021-3, 353-752021, 353-852011
Compatible controls	360-21001
Configuration	master
Input voltage	230 Vac \pm 10 %, 50 Hz
Detector output	DALI Broadcast/DALI Addressable
Maximum power consumption	0.6 W
Maximum power consumption wireless link active	0.65 W
Maximum MCB rating	16 A (limited by national installation rules)
Short circuit behaviour shutdown trigger	voltage below 12 V, exceeding 1.3 s
Short circuit behaviour restart period	every 14 s until success
Maximum voltage on the DALI bus	15 Vdc
Maximum guaranteed current on the DALI bus	200 mA
Maximum supply current	250 mA
Maximum startup time DALI	< 1200 ms
Maximum PIR detection startup time	1 min 10 s
Relay contact	N.O. (max. 10 A), potential-free
Maximum load incandescent and halogen lamps ($\cos\phi = 1$)	2300 W
Maximum load fluorescent lamps ($\cos\phi \geq 0.5$)	1200 VA
Maximum load fluorescent lamps ($\cos\phi \geq 0.9$)	1200 VA
Maximum load economy lamps (CFLi)	350 W
Maximum load LED lamps 230 V	350 W
Maximum load LED driver	500 VA
Maximum load electronic transformer	500 VA
Maximum capacitive load	140 μ F
Maximum switching current	165 A/20 ms – 800 A/200 μ s
Light intensity range	20 lux – 2000 lux, ∞
Maximum number of secondary detectors	5
Maximum number of control gear on the DALI bus	64
Maximum number of dimmable zones	4
Switch-off delay	pulse, 20 s – 2 h, ∞
Detection angle	360°
Detection range (PIR)	\varnothing 12 m from a height of 3 m
Ambient temperature	-25 – +40 °C
Mounting method	flush-mounting (SnapFit)
Mounting height	2 – 3.5 m
Drill diameter	76 mm
Minimum flush-mounting depth	100 mm
Colour	white (approximately RAL 9010)
Dimensions visible (HxWxD)	100 x 100 x 9.5 mm

Dimensions (HxWxD)	120 x 120 x 109.5 mm
Maximum range Bluetooth® (free field, depending on the device)	50 m
Operating frequency	2.4 GHz
Maximum radio frequency power	-2 dBm
Protection degree	IP20
Impact resistance	IK02
Modification of settings	Niko detector tool app (iOS-Android) and 2-way Bluetooth® communication
Halogen-free	yes
Marking	CE
Cable specifications	<ul style="list-style-type: none"> – cable colour: black – length: 2 m – wire cross-section: 1,5 mm² – voltage: 230 V – rated current: 16 A – halogen-free: yes – ambient temperature: -5 – +70C° – type of connector: male, 5-pole, blue

Accessories

353-999869	Lens cover for P4XMR and M4XMR detectors, transparent (5 pieces)
390-20001	Protection grid

Dimensions

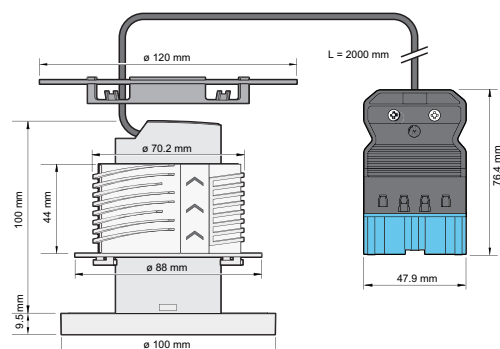

Wiring diagram

