

Motion detector, 230 V, 16 m, 240°, IP54, for surface mounting, white

351-26560

4 year warranty

This 1-channel outdoor motion detector, which is not activated by pets, is perfectly suitable for every light switch around the house. The detection range is 16 metres. The motion sensor can be precisely aimed. The device has a built-in light sensor and switches the lighting on automatically or manually with an N.O. push button (to be ordered separately). After the pre-set time delay, the light is switched off automatically. This sensor can be configured both manually and by remote control.

Finishing colour: white




- Animal detection can be switched on/off
- Low crossing detection
- Low consumption (0.25 W)
- Detection head adjustable horizontally and vertically
- Separate setting for the lux, the switch-off delay and the sensitivity
- Can be programmed manually or using the optional remote control
- High-performing detection with few inadvertent triggers

Motion detector for use in driveways, carports, gardens, etc.

- The lighting remains on while there is motion
- You can split the detection zone using the cover mask provided.
- The user remote control provided allows you to turn animal detection on and off and turn the lights on and off manually.
- Potential-free contact

Detection range



| H | A Across | B Towards |
|-----|-------------|--------------|
| 2 m | 16 m | 8 m |
| 3 m | 16 m | 8 m |
| 4 m | 16 m | 8 m |
| 5 m | 16 m | 8 m |



230 V



stand-alone



240°



16 m from
a height of
3 m



2 - 5 m



surface
mounting

niko


Technical data

| | |
|--|---|
| Article number | 351-26560 |
| Configuration | stand-alone |
| Input voltage | 230 Vac \pm 10 %, 50 Hz |
| Detector output | 230 V (ON/OFF) |
| Maximum power consumption | 0.6 W |
| Maximum current consumption | 2.61 mA |
| Maximum MCB rating | 10 A (limited by national installation rules) |
| Relay contact | N.O. (max. 8.7 A), potential-free |
| Maximum load incandescent and halogen lamps ($\cos\phi = 1$) | 2000 W |
| Maximum load fluorescent lamps ($\cos\phi \geq 0.5$) | 1000 VA |
| Maximum load economy lamps (CFLi) | 300 W |
| Maximum load LED lamps 230 V | 300 W |
| Maximum load LED driver | 300 VA |
| Maximum load electronic transformer | 1000 VA |
| Light intensity range | 5 lux – 2000 lux |
| Number of channels | 1 channel |
| Switch-off delay | pulse, 10 s – 20 min |
| Detection angle | 240° |
| Detection range (PIR) | 16 m from a height of 3 m |
| Ambient temperature | -20 – +50 °C |
| Mounting method | surface mounting |
| Mounting height | 2 – 5 m |
| Dimensions (HxWxD) | 112 x 105 x 148 mm |
| Protection degree | IP54 |
| Impact resistance | IK02 |
| Modification of settings | Potentiometers or IR remote control |
| Marking | CE |

Accessories

| | |
|-----------|-------------------------------------|
| 351-10170 | Mounting bracket for corners, white |
| 351-10172 | Mounting bracket for corners, black |
| 351-25320 | IR remote control |
| 351-25310 | IR remote control for users |

Dimensions

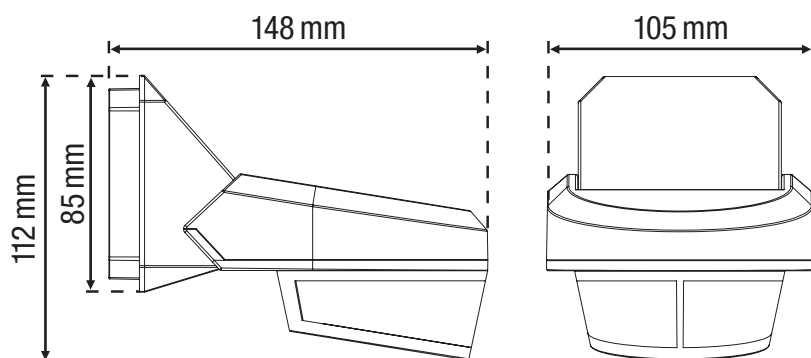

Wiring diagram

