

# Presence detector, KNX®, 4 channels, 16 m, for flush-mounting box

351-25038

4 year warranty

The presence detector with four channels and daylight control for flush-mounting box in ceilings is suitable for switching the indoor lighting on and off. The detector is equipped with an integrated light sensor and is only compatible with KNX®.

## Technical data

Presence detector, KNX®, 4 channels, 16 m, for flush-mounting box.




- Detector technology: PIR
- Input voltage: 30 Vdc via KNX®-bus
- Detector output: KNX®
- Maximum power consumption: 0.3 W
- Maximum current consumption: 10 mA
- Number of channels: 4 channels
- Light intensity range: 10 lux – 2000 lux
- Switch-off delay: 1 s – 4 h
- Detection angle: 360°
- Detection range (PIR): ø 16 m from a height of 3 m
- Ambient temperature: -20 – +40 °C
- Mounting method: flush-mounting box
- Mounting height: 2 – 8 m
- Usage: for indoor use only
- Dimensions (HxWxD): 88 x 88 x 47 mm
- Dimensions visible (HxWxD): 88 x 88 x 35 mm
- Modification of settings: ETS software
- Protection degree: IP20
- Impact resistance: IK02
- Protection class: Class III device
- Marking: CE
- Detector technology: PIR
- Input voltage: 30 Vdc via KNX®-bus
- Detector output: KNX®
- Maximum power consumption: 0.3 W
- Maximum current consumption: 10 mA
- Number of channels: 4 channels
- Light intensity range: 10 lux – 2000 lux
- Switch-off delay: 1 s – 4 h
- Detection angle: 360°

**niko**

- Detection range (PIR):  $\varnothing$  16 m from a height of 3 m
- Ambient temperature: -20 – +40 °C
- Mounting method: flush-mounting box
- Mounting height: 2 – 8 m
- Usage: for indoor use only
- Dimensions (HxWxD): 88 x 88 x 47 mm
- Modification of settings: ETS software
- Impact resistance: IK02
- Protection class: Class III device
- Marking: CE



### Dimensions

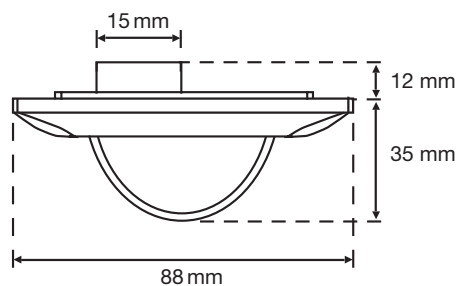

### Wiring diagram

