

# Motion detector, 230 V, 26 m, round, for flush-mounting box, white

351-25065

4 year warranty

The motion detector with one channel for flush-mounting in ceilings is suitable for switching indoor lighting on and off. You can always activate the light with a N.O. push button (230 Vac) (to be ordered separately). The detector is equipped with an integrated light sensor.  
Finishing colour: white


- The presence detector for each large room
- Can be placed at a height of up to 8 metres
- Separate setting for the lux, the switch-off delay and the sensitivity
- Low consumption (0.25 W)
- Surface-mounting boxes available separately

The motion detector for large meeting rooms, hangars, etc.


- The lighting remains on while there is motion
- You can programme it manually or using the optional remote control
- You can always be certain of excellent detection thanks to the three PIR sensors.



## Detection range



| H   | A<br>Across | B<br>Towards |
|-----|-------------|--------------|
| 2 m | ∅ 20 m      | ∅ 10 m       |
| 3 m | ∅ 26 m      | ∅ 13 m       |
| 4 m | ∅ 28 m      | ∅ 14 m       |
| 5 m | ∅ 30 m      | ∅ 15 m       |
| 6 m | ∅ 30 m      | ∅ 15 m       |
| 7 m | ∅ 30 m      | ∅ 15 m       |
| 8 m | ∅ 30 m      | ∅ 15 m       |

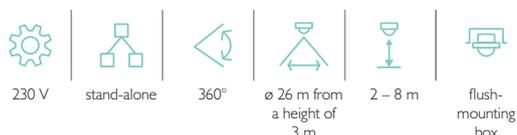

**niko**


## Technical data

|  |   |
|--|---|
| Article number   | 351-25065                                     |
| Input voltage  | 230 Vac $\pm$ 10 %, 50 Hz                     |
| Detector output  | 230 V (ON/OFF)                                |
| Maximum MCB rating   | 10 A (limited by national installation rules) |
| Relay contact  | N.O. (max. 10 A)                              |
| Maximum load incandescent and halogen lamps ( $\cos\phi = 1$ ) | 2300 W  |
| Maximum load fluorescent lamps ( $\cos\phi \geq 0.5$ )         | 1150 VA                                       |
| Maximum load economy lamps (CFLi)                              | 350 W   |
| Maximum load LED lamps 230 V                                   | 350 W   |
| Light intensity range  | 5 lux – 2000 lux                              |
| Number of channels   | 1 channel                                     |
| Switch-off delay   | pulse, 10 s – 20 min                          |
| Detection angle  | 360°  |
| Detection range (PIR)  | $\varnothing$ 26 m from a height of 3 m       |
| Ambient temperature  | -20 – +40 °C                                  |
| Mounting method  | flush-mounting box                            |
| Mounting height  | 2 – 8 m                                       |
| Dimensions visible (HxWxD)                                     | 105 x 105 x 43 mm                             |
| Dimensions (HxWxD)   | 105 x 105 x 79 mm                             |
| Protection degree  | IP20  |
| Marking  | CE  |

## Accessories

|           |   |
|-----------|---|
| 350-41936 | Universal remote control for smartphone |
| 351-25320 | IR remote control                       |
| 351-25310 | IR remote control for users             |
| 351-25420 | Surface-mounting box, white             |

## Dimensions

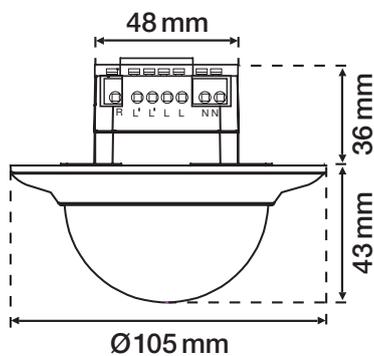

## Wiring diagram

