

Garden post with socket outlet 16 A/250 Vac, side earthing and spike

The splashproof garden post includes one to three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments. The Niko Hydro products are not suitable for use in ammonia rich environments (e.g. pig houses).



h $\frac{16 A}{250 Vac}$

Garden post with socket outlet 16 A/250 Vac, side earthing and spike




The splashproof garden post includes one to three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments. The Niko Hydro products are not suitable for use in ammonia rich environments (e.g. pig houses).

- spike included
- input voltage: 230 Vac \pm 10 %, 50 Hz
- material: stainless steel
- dimensions: (1-fold) 240 x 83 x 68 mm (HxWxD)
- dimensions: (2-fold) 347 x 83 x 68 mm (HxWxD)
- dimensions: (3-fold) 422 x 83 x 68 mm (HxWxD)
- dimensions spike: 250 x 100 x 80 mm (HxWxD)







GARDEN POST WITH SINGLE SOCKET OUTLET




	700-36815	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, grey
	701-36815	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, white
	761-36815	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, black




GARDEN POST WITH DOUBLE SOCKET OUTLET



	700-36825	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, grey
	701-36825	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, white
	761-36825	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, black

GARDEN POST WITH THREE-FOLD SOCKET OUTLET




	700-36835	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, grey
	701-36835	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, white
	761-36835	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, black

700-36815

4 year
warranty


Splashproof garden post with single socket outlet, side earthing and spike, grey

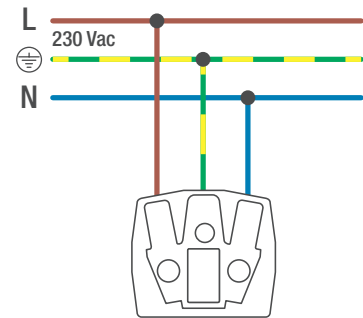

The splashproof garden post includes one socket outlet (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with single socket outlet, side earthing and spike, grey. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 1
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: grey
- Dimensions (HxWxD): 240 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



701-36815

4 year
warranty


Splashproof garden post with single socket outlet, side earthing and spike, white

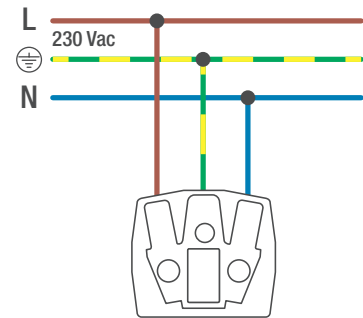

The splashproof garden post includes one socket outlet (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with single socket outlet, side earthing and spike, white. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 1
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: white
- Dimensions (HxWxD): 240 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



761-36815

4 year warranty


Splashproof garden post with single socket outlet, side earthing and spike, black

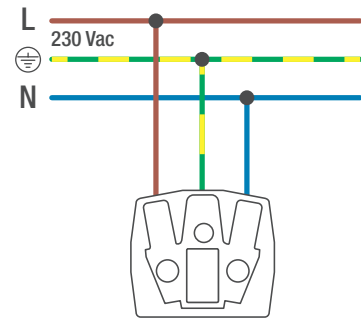

The splashproof garden post includes one socket outlet (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with single socket outlet, side earthing and spike, black. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 1
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: black
- Dimensions (HxWxD): 240 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



700-36825

4 year
warranty

Splashproof garden post with double socket outlet, side earthing and spike, grey

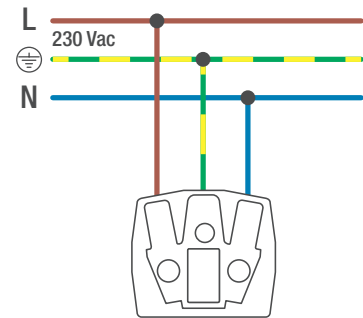

The splashproof garden post includes two socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with double socket outlet, side earthing and spike, grey. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 2
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: grey
- Dimensions (HxWxD): 347 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



701-36825

4 year
warranty

Splashproof garden post with double socket outlet, side earthing and spike, white

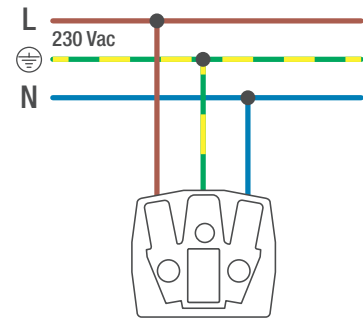

The splashproof garden post includes two socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with double socket outlet, side earthing and spike, white. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 2
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: white
- Dimensions (HxWxD): 347 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



761-36825

4 year warranty

Splashproof garden post with double socket outlet, side earthing and spike, black

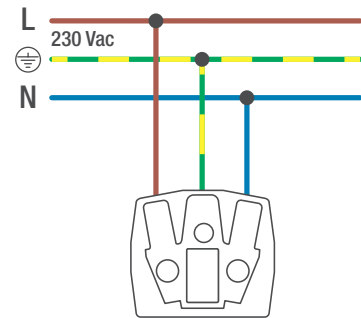

The splashproof garden post includes two socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with double socket outlet, side earthing and spike, black. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 2
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: black
- Dimensions (HxWxD): 347 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



700-36835

4 year
warranty

Splashproof garden post with three-fold socket outlet, side earthing and spike, grey

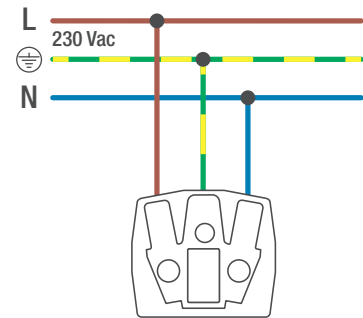

The splashproof garden post includes three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with three-fold socket outlet, side earthing and spike, grey. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 3
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: grey
- Dimensions (HxWxD): 422 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



701-36835

4 year
warranty

Splashproof garden post with three-fold socket outlet, side earthing and spike, white

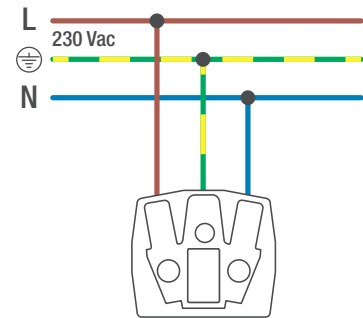

The splashproof garden post includes three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with three-fold socket outlet, side earthing and spike, white. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 3
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: white
- Dimensions (HxWxD): 422 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



761-36835

4 year
warranty

Splashproof garden post with three-fold socket outlet, side earthing and spike, black

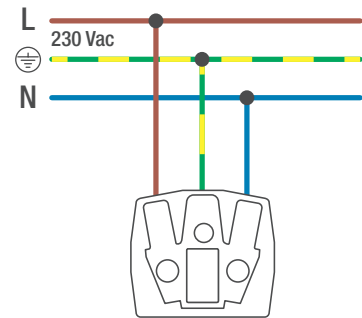

The splashproof garden post includes three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with three-fold socket outlet, side earthing and spike, black. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur

- Number of mechanisms: 3
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: black
- Dimensions (HxWxD): 422 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel

