

Motion detector 360°, 230 V, 1 channel, 16 m, flush-mounting, square

351-25000

4 year warranty

The motion detector with one channel for flush-mounting in ceilings is suitable for switching indoor lighting on and off. You can always activate the light with a NO push button (230 V AC) (to be ordered separately). The detector is equipped with an integrated light sensor.


Technical data

Motion detector 360°, 230 V, 1 channel, 16 m, flush-mounting, square.

- Input voltage: 230 Vac \pm 10 %, 50 Hz
- Number of channels: 1 channel
- Light intensity range: 5 lux – 2000 lux
- Switch-off delay: pulse, 10 s – 20 min
- Detection angle: 360 °
- Detection range (PIR): up to 14 m in diameter from a height of 3 m
- Ambient temperature: -20 – +40 °C
- Mounting method: flush-mounting
- Mounting height: 2 – 6 m
- Relay contact 1: NO. (max. 10 A)
- Maximum load incandescent and halogen lamps ($\cos\phi=1$): 2300 W
- Maximum load fluorescent lamps ($\cos\phi \geq 0,5$): 1150 VA
- Maximum load low voltage halogen lamps: 1150 W
- Maximum load economy lamps (CFLi): 350 W
- Maximum load LED lamps 230 V: 350 W
- Dimensions (HxWxD): 88 x 88 x 71 mm
- Protection degree: IP20
- Protection class: Class II device
- Marking: CE



Dimensions

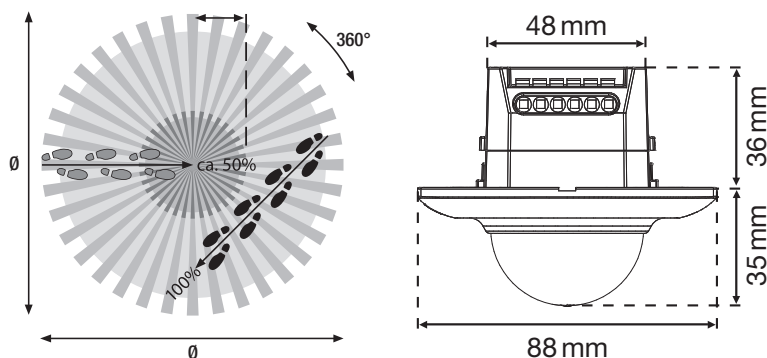

Wiring diagram

