

Presence or absence detector 360°, 230 V, 14 m, secondary, flush-mounting, round


351-25459

4 year warranty

The presence or absence detector for flush mounting in ceilings is suitable for switching the indoor lighting on and off. Automatic on/off (presence detector) or manual on/automatic off (absence detector). The detection area can be divided by means of an adjustable cover mask. Use exclusively in combination with a Master (351-25451/56/57/63/66/67).



Detection range



Height	1 person	2 persons	3 persons
2 m	4 m	5 m	10 m
2.5 m	5 m	6 m	12 m
3 m	6 m	7 m	14 m
3.5 m	7 m	8 m	16 m
4 m	8 m	8 m	16 m
5 m	8 m	8 m	16 m
6 m	8 m	8 m	16 m



230 V



secondary



360°



ø 14 m from
a height of
3 m



2 – 6 m

flush-
mounting
or surface-
mounting


Technical data

Article number	351-25459
Input voltage	230 Vac \pm 10 %, 50 Hz
Detector output	230 V (ON/OFF)
Number of channels	1 channel
Detection angle	360 °
Detection range (PIR)	ø 14 m from a height of 3 m
Ambient temperature	-20 – +40 °C
Mounting method	flush-mounting or surface-mounting
Mounting height	2 – 6 m
Drill diameter	48 mm
Dimensions visible (HxWxD)	35 mm
Dimensions (HxWxD)	105 x 105 x 71 mm
Wire capacity	1.5 mm ²
Protection degree	IP20
Marking	CE

Accessories

351-25420	Surface-mounting box for 351-25340
-----------	------------------------------------

Dimensions

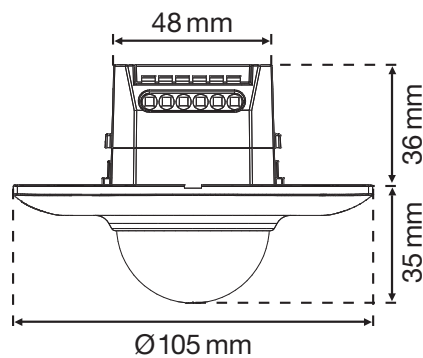

Wiring diagram

