

Garden post with socket outlet 16 A/250 Vac, side earthing and baseplate

The splashproof garden post includes one to three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments. The Niko Hydro products are not suitable for use in ammonia rich environments (e.g. pig houses).




Garden post with socket outlet 16 A/250 Vac, side earthing and baseplate




The splashproof garden post includes one to three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments. The Niko Hydro products are not suitable for use in ammonia rich environments (e.g. pig houses).

- baseplate included
- input voltage: 230 Vac \pm 10 %, 50 Hz
- material: stainless steel
- dimensions: (1-fold) 240 x 83 x 68 mm (HxWxD)
- dimensions: (2-fold) 347 x 83 x 68 mm (HxWxD)
- dimensions: (3-fold) 422 x 83 x 68 mm (HxWxD)
- dimensions baseplate: 150*150







GARDEN POST WITH SINGLE SOCKET OUTLET




	700-36915	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, grey
	701-36915	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, white
	761-36915	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, black




GARDEN POST WITH DOUBLE SOCKET OUTLET



	700-36925	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, grey
	701-36925	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, white
	761-36925	Pieces: 1	

GARDEN POST WITH THREE-FOLD SOCKET OUTLET




	700-36935	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, grey
	701-36935	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, white
	761-36935	Pieces: 1	With plug-in terminals and 1x2 M20 cable glands, black

700-36915

4 year
warranty


Splashproof garden post with single socket outlet, side earthing and baseplate, grey

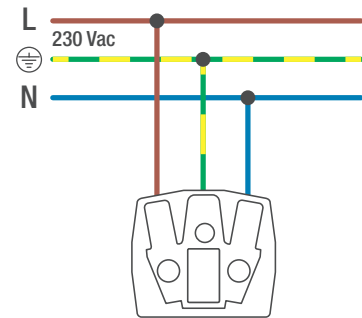

The splashproof garden post includes one socket outlet (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with single socket outlet, side earthing and baseplate, grey. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 1
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: grey
- Dimensions (HxWxD): 240 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



701-36915

4 year warranty


Splashproof garden post with single socket outlet, side earthing and baseplate, white

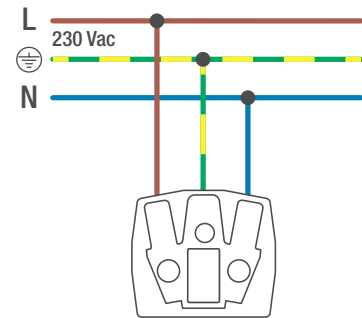

The splashproof garden post includes one socket outlet (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with single socket outlet, side earthing and baseplate, white. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 1
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: white
- Dimensions (HxWxD): 240 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



761-36915

4 year warranty


Splashproof garden post with single socket outlet, side earthing and baseplate, black

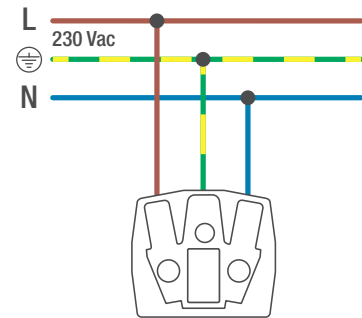

The splashproof garden post includes one socket outlet (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with single socket outlet, side earthing and baseplate, black. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 1
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: black
- Dimensions (HxWxD): 240 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



700-36925

4 year
warranty

Splashproof garden post with double socket outlet, side earthing and baseplate, grey

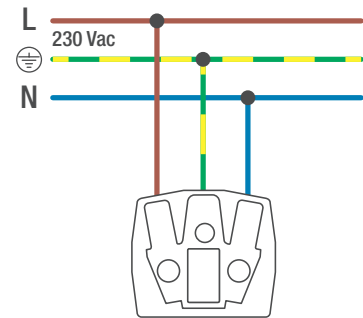

The splashproof garden post includes two socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with double socket outlet, side earthing and baseplate, grey. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 2
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: grey
- Dimensions (HxWxD): 347 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



701-36925

4 year
warranty

Splashproof garden post with double socket outlet, side earthing and baseplate, white

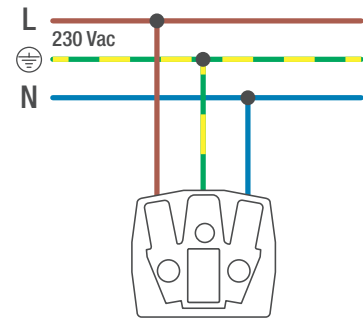

The splashproof garden post includes two socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with double socket outlet, side earthing and baseplate, white. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 2
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: white
- Dimensions (HxWxD): 347 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



761-36925

4 year
warranty

Splashproof garden post with double socket outlet, side earthing and baseplate, black

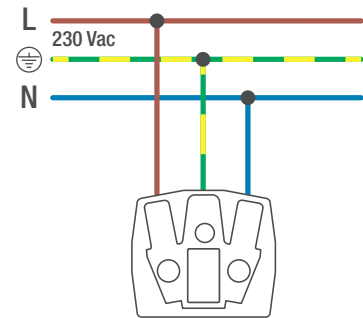

The splashproof garden post includes two socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post with double socket outlet, side earthing and baseplate, black. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 2
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: black
- Dimensions (HxWxD): 347 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



700-36935

4 year
warranty

Splashproof garden post, with three-fold socket outlet, side earthing and baseplate, grey

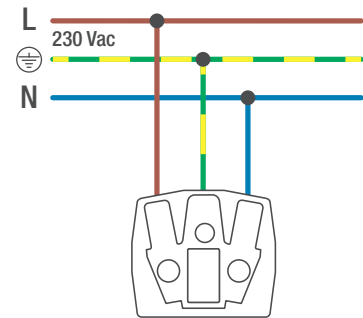

The splashproof garden post includes three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post, with three-fold socket outlet, side earthing and baseplate, grey. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 3
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: grey
- Dimensions (HxWxD): 422 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



701-36935

4 year
warranty

Splashproof garden post, with three-fold socket outlet, side earthing and baseplate, white

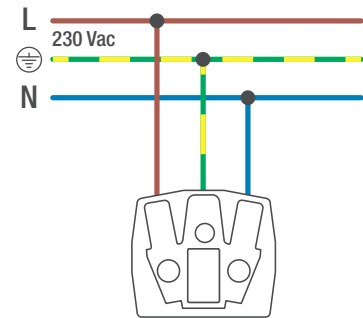

The splashproof garden post includes three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post, with three-fold socket outlet, side earthing and baseplate, white. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur


- Number of mechanisms: 3
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: white
- Dimensions (HxWxD): 422 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel



761-36935

4 year
warranty

Splashproof garden post, with three-fold socket outlet, side earthing and baseplate, black

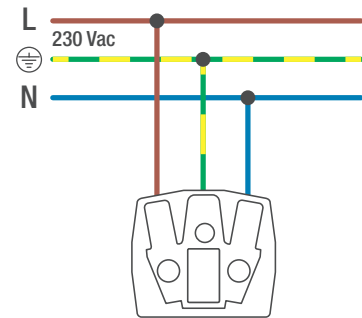

The splashproof garden post includes three socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. The garden post has an IP55 protection degree and is equipped with a baseplate for installation on a solid surface. The entire unit is splashproof, which makes it extremely well-suited for use in damp areas and demanding environments.

Splashproof garden post, with three-fold socket outlet, side earthing and baseplate, black. The socket outlet is provided with contact buses with a large contact surface that do not rest on the base in order to clasp. Handmade product: small deviations in form may occur

- Number of mechanisms: 3
- Protection degree: IP55
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: black
- Dimensions (HxWxD): 422 x 83 x 68 mm
- Marking: CE
- Material housing: stainless steel

