


1 x RJ45 STP Cat6, flat set

Incl. adapter 9.1 and 1 connector

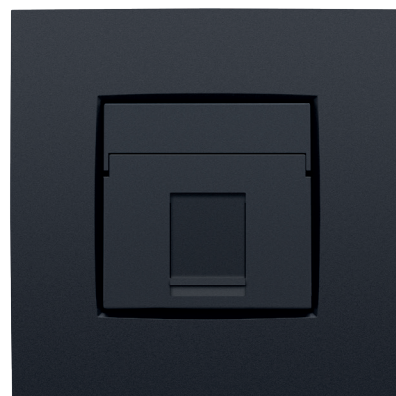

1 x RJ45 STP Cat6, flat set

Incl. adapter 9.1 and 1 connector



BASE



170-65166 Pieces: 10 For claw fixing



170-65266 Pieces: 10 For screw fixing



170-75166 Pieces: 10 For claw fixing, centre distance 71 mm



170-75266 Pieces: 10 For screw fixing, centre distance 71 mm

FINISHING SET WITH NON-TRANSPARENT LABELLING WINDOW



100-65100 Pieces: 10
104-65100 Pieces: 10
123-65100 Pieces: 10
157-65100 Pieces: 10
220-65100 Pieces: 10



101-65100 Pieces: 10
121-65100 Pieces: 10
124-65100 Pieces: 10
161-65100 Pieces: 10
221-65100 Pieces: 10



102-65100 Pieces: 10
122-65100 Pieces: 10
154-65100 Pieces: 10
200-65100 Pieces: 10

DIN RAIL CONNECTOR (INCL. DIN RAIL ADAPTER AND CONNECTOR RJ45 STP CAT.6)




650-14566 Pieces: 10 DIN rail RJ45 STP Cat.6

170-65166

4 year
warranty

1 RJ45-connection STP cat. 6, flat model, incl. base 60 x 71 mm with claw fixing



This mechanism with 1 RJ45 connection point, Cat 6 STP, is used to make a network connection with 1 device for telephone, Ethernet, IP or Internet applications. Due to its high-quality, this type also offers the possibility to transmit TV distribution signals for analogue, digital and interactive TV images. The mechanism is connected in star configuration to the central connection cabinet using a cable of the same performance type. The shielding ensures a more malfunction-resistant connection. The flush-mounting frame has interior dimensions 45x45 mm and exterior dimensions 60x71 mm. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of 60 x 71 mm by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

1 RJ45-connection STP cat. 6, flat model, incl. base 60 x 71 mm with claw fixing.


Universal base 45 x 45 mm. When mounting the socket outlet in a flush-mounting box with grip surfaces, use claws that can be rotated open using screws with a combination screwhead (Pz1 or slot 1 x 5 mm). The claws, which have a depth of engagement of 31 mm, can be manually pushed back into their original position after unscrewing. These claws can also be easily pushed out using a screwdriver. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of 60 x 71 mm by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed. The flush-mounting frame is equipped, both on the top and the bottom, with a dark grey, plastic end border. This border is made of PC+ASA and is joined to the flush-mounting frame using a melting process. The corners of the two end borders are equipped with rectangular openings (7.9 x 1.5 mm) each containing a multi-positional snap hook. Thanks to the snap hooks, the 4 rectangular openings ensure that the flush surround plate can always be attached flat to the wall, even in cases of untidy plasterwork. This works in two directions: If the flush-mounting box sticks out of the plasterwork, the multi-positional snap hooks can compensate for a 1 to 1.2 mm margin; if the flush-mounting box is sunk too deeply in the plasterwork, the snap hooks can compensate for up to a 1.8 mm margin. The end borders also have 4 round openings that ensure the correct positioning of the flush surround plate in relation to the central plate.

- Dimensions (HxWxD): 45 x 45 mm

170-65266

4 year
warranty

1 RJ45-connection STP cat. 6, flat model, incl. base 60 x 71 mm with screw fixing



This mechanism with 1 RJ45 connection point, Cat 6 STP, is used to make a network connection with 1 device for telephone, Ethernet, IP or Internet applications. Due to its high-quality, this type also offers the possibility to transmit TV distribution signals for analogue, digital and interactive TV images. The mechanism is connected in star configuration to the central connection cabinet using a cable of the same performance type. The shielding ensures a more malfunction-resistant connection. The flush-mounting frame has interior dimensions 45x45 mm and exterior dimensions 60x71 mm. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of 60 x 71 mm by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

1 RJ45-connection STP cat. 6, flat model, incl. base 60 x 71 mm with screw fixing.


Universal base 45 x 45 mm. When fixing in a flush-mounting box screws should be used. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ...) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of 60 x 71 mm by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed. The flush-mounting frame is equipped, both on the top and the bottom, with a dark grey, plastic end border. This border is made of PC+ASA and is joined to the flush-mounting frame using a melting process. The corners of the two end borders are equipped with rectangular openings (7.9 x 1.5 mm) each containing a multi-positional snap hook. Thanks to the snap hooks, the 4 rectangular openings ensure that the flush surround plate can always be attached flat to the wall, even in cases of untidy plasterwork. This works in two directions: If the flush-mounting box sticks out of the plasterwork, the multi-positional snap hooks can compensate for a 1 to 1.2 mm margin; if the flush-mounting box is sunk too deeply in the plasterwork, the snap hooks can compensate for up to a 1.8 mm margin. The end borders also have 4 round openings that ensure the correct positioning of the flush surround plate in relation to the central plate.

- Dimensions (HxWxD): 45 x 45 mm

170-75166

4 year
warranty

1 RJ45-connection STP cat. 6, flat model, incl. base 71 x 71 mm with claw fixing



This mechanism with 1 RJ45 connection point, Cat 6 STP, is used to make a network connection with 1 device for telephone, Ethernet, IP or Internet applications. Due to its high-quality, this type also offers the possibility to transmit TV distribution signals for analogue, digital and interactive TV images. The mechanism is connected in star configuration to the central connection cabinet using a cable of the same performance type. The shielding ensures a more malfunction-resistant connection. The flush-mounting frame has interior dimensions 45x45 mm and exterior dimensions 71 x 71 mm. The base is equipped on all sides with folded-up dovetails, allowing for both vertical and horizontal coupling (centre-to-centre distance of 71 x 71 mm) of several bases to be carried out quickly and perfectly. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. A finishing set and flush surround plate in the colour of your choice must be ordered separately.


1 RJ45-connection STP cat. 6, flat model, incl. base 71 x 71 mm with claw fixing.

Universal base 45 x 45 mm. When mounting the socket outlet in a flush-mounting box with grip surfaces, use claws that can be rotated open using screws with a combination screwhead (Pz1 or slot 1 x 5 mm). The claws, which have a depth of engagement of 31 mm, can be manually pushed back into their original position after unscrewing. These claws can also be easily pushed out using a screwdriver. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. The base is equipped on all sides with folded-up dovetails, allowing for both vertical and horizontal coupling (centre-to-centre distance of 71 x 71 mm) of several bases to be carried out quickly and perfectly. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The flush-mounting frame is equipped, both on the top and the bottom, with a dark grey, plastic end border. This border is made of PC+ASA and is joined to the flush-mounting frame using a melting process. The corners of the two end borders are equipped with rectangular openings (7.9 x 1.5 mm) each containing a multi-positional snap hook. Thanks to the snap hooks, the 4 rectangular openings ensure that the flush surround plate can always be attached flat to the wall, even in cases of untidy plasterwork. This works in two directions: If the flush-mounting box sticks out of the plasterwork, the multi-positional snap hooks can compensate for a 1 to 1.2 mm margin; if the flush-mounting box is sunk too deeply in the plasterwork, the snap hooks can compensate for up to a 1.8 mm margin. The end borders also have 4 round openings that ensure the correct positioning of the flush surround plate in relation to the central plate.

170-75266

4 year
warranty

1 RJ45-connection STP cat. 6, flat model, incl. base 71 x 71 mm with screw fixing



This mechanism with 1 RJ45 connection point, Cat 6 STP, is used to make a network connection with 1 device for telephone, Ethernet, IP or Internet applications. Due to its high-quality, this type also offers the possibility to transmit TV distribution signals for analogue, digital and interactive TV images. The mechanism is connected in star configuration to the central connection cabinet using a cable of the same performance type. The shielding ensures a more malfunction-resistant connection. The flush-mounting frame has interior dimensions 45x45 mm and exterior dimensions 71 x 71 mm. The base is equipped on all sides with folded-up dovetails, allowing for both vertical and horizontal coupling (centre-to-centre distance of 71 x 71 mm) of several bases to be carried out quickly and perfectly. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The base is fitted with screw fixing. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

1 RJ45-connection STP cat. 6, flat model, incl. base 71 x 71 mm with screw fixing.

Universal base 45 x 45 mm. When fixing in a flush-mounting box screws should be used. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ...) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. The base is equipped on all sides with folded-up dovetails, allowing for both vertical and horizontal coupling (centre-to-centre distance of 71 x 71 mm) of several bases to be carried out quickly and perfectly. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The flush-mounting frame is equipped, both on the top and the bottom, with a dark grey, plastic end border. This border is made of PC+ASA and is joined to the flush-mounting frame using a melting process. The corners of the two end borders are equipped with rectangular openings (7.9 x 1.5 mm) each containing a multi-positional snap hook. Thanks to the snap hooks, the 4 rectangular openings ensure that the flush surround plate can always be attached flat to the wall, even in cases of untidy plasterwork. This works in two directions: If the flush-mounting box sticks out of the plasterwork, the multi-positional snap hooks can compensate for a 1 to 1.2 mm margin; if the flush-mounting box is sunk too deeply in the plasterwork, the snap hooks can compensate for up to a 1.8 mm margin. The end borders also have 4 round openings that ensure the correct positioning of the flush surround plate in relation to the central plate.