

Presence detector, 230 V, secondary, 24 m, IP54, for surface mounting, white

350-20079

4 year warranty

This presence or absence detector (360°, secondary) is suitable for surface mounting on ceilings and is used to switch indoor lighting on and off but only in combination with a master. The detector has a circular detection area with a diameter of up to 24 m that can be adjusted using the cover mask. The device follows the settings of the master. The sensitivity of the secondary detector, though, can be set separately. This motion detector has an IP54 protection degree and complies with the European directives for EMC and safety, EN 60669-2-1. A maximum of ten secondary detectors can be connected per master.

Finishing colour: white


Compatible master detectors: 350-20070, 350-20072, 350-20078, 350-20080, 350-20082

- Simple mounting
- Low power consumption
- Splashproof (IP54)


For use in offices, school buildings, cafeterias, etc.



Detection range



| H | A Across | B Towards | C Presence |
|-------|-------------|--------------|---------------|
| 2 m | ∅ 16 m | ∅ 10 m | ∅ 4 m |
| 2.5 m | ∅ 20 m | ∅ 12 m | ∅ 5 m |
| 3 m | ∅ 24 m | ∅ 14.4 m | ∅ 6 m |
| 3.5 m | ∅ 28 m | ∅ 16 m | ∅ 7 m |



230 V



secondary



360°



∅ 24 m from a height of 3 m



2 – 3.4 m




surface mounting

niko

Technical data

| | |
|-----------------------------|---|
| Article number | 350-20079 |
| Compatible master detectors | 350-20070, 350-20072, 350-20078, 350-20080, 350-20082 |
| Input voltage | 230 Vac \pm 10 %, 50 Hz |
| Detector output | 230 V (ON/OFF) |
| Maximum MCB rating | 10 A (limited by national installation rules) |
| Detection angle | 360° |
| Detection range (PIR) | ø 24 m from a height of 3 m |
| Ambient temperature | -5 – +50 °C |
| Mounting method | surface mounting |
| Mounting height | 2 – 3.4 m |
| Dimensions (HxWxD) | 117.3 x 117.3 x 64.1 mm |
| Protection degree | IP54 |
| Marking | CE |

Dimensions

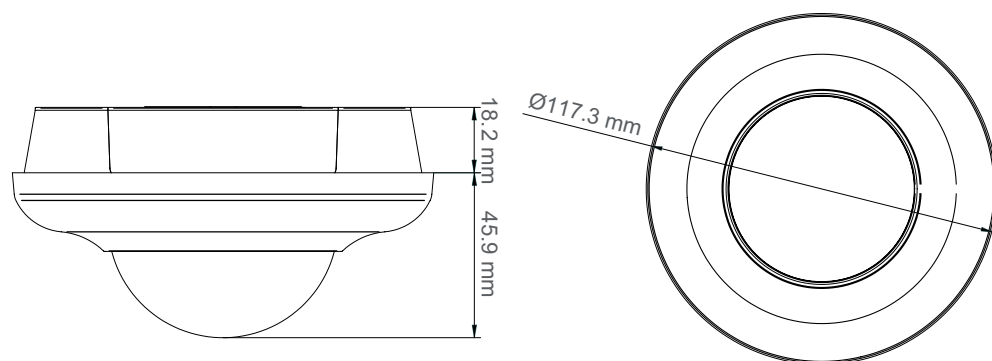

Wiring diagram

