

Flat presence or absence detector 360°, 12 m, with 3 zone DALI daylight control, secondary, for flush mounting, (white)


350-41659

4 year warranty

This presence detector (DALI daylight control, secondary) is suitable for flush-mounting in ceilings with a height of 2.4 – 3 m and can only be used in combination with the master (350-41657) to increase its detection range. The detector has a very flat design of only 5 mm, so that it can be mounted almost flush with the ceiling. The device follows the settings of the master. The sensitivity of the secondary detector, though, can be set separately. A maximum of ten secondary detectors can be connected per master. Finishing colour: white



Detection range

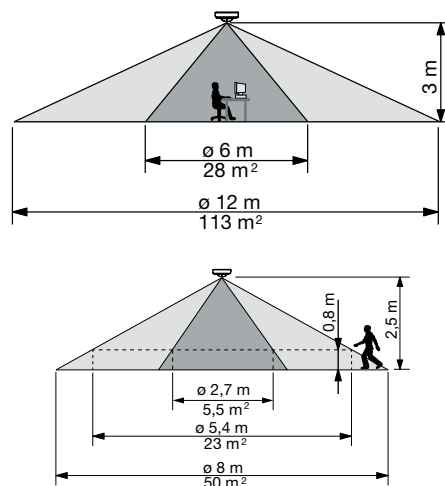

DALI



secondary



360°




12 m from
a height of
3 m



2.4 – 3 m



flush-
mounting

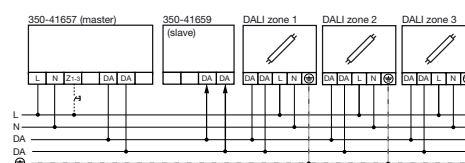


Technical data

Article number	350-41659
Input voltage	via the DALI bus
Detector output	DALI
Detection angle	360 °
Detection range (PIR)	ø 12 m from a height of 3 m
Ambient temperature	-5 – +40 °C
Mounting method	flush-mounting
Mounting height	2.4 – 3 m
Drill diameter	77 mm
Dimensions visible (HxWxD)	5 mm
Dimensions (HxWxD)	95 x 95 x 95 mm
Wire capacity	NA
Protection degree	IP20
Marking	CE

Accessories

350-41936	Universal remote control for smartphone
350-41934	IR-remote control for users

Dimensions

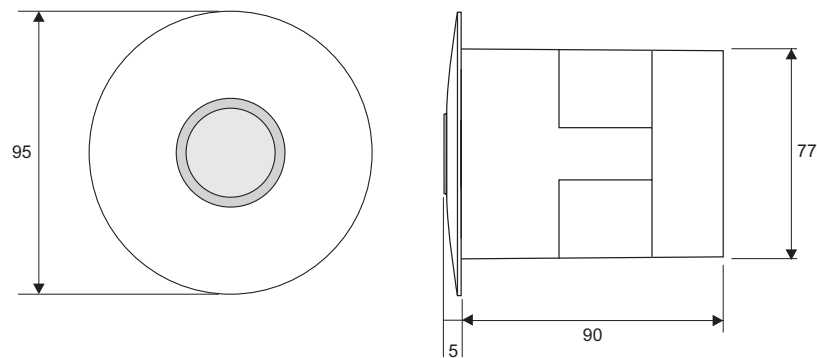

Wiring diagram

