


Transponder reader module for modular external unit

Function description

The transponder reader module is used as a door opening function. Up to 2,000 transponder keys (10-905-01) or cards (10-905-02) can be saved. When reading the key or card, you receive visual and acoustic feedback. The programming of the system is password-protected. The module is made of black plastic.

The transponder reader module includes an IR remote control.

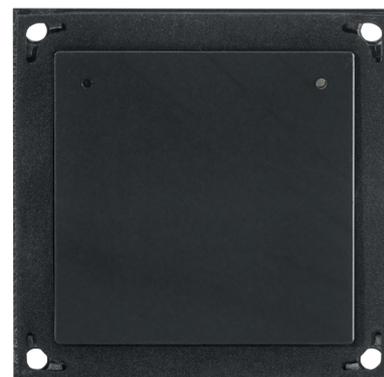

Technical data

Reference number	10-364
Dimensions	105 x 105 x 26 mm (HxWxD)
Finishing colour, material	black plastic
Vandal proof	yes
Power supply voltage	+24V \pm 8 % (18-28V in stand-alone)
Input current in standby	I(a) = 0.1 mA, I(P) = 11 mA
Max. input current	I(Pmax) = 25 mA
Wiring	2- or 3-wired
Protection degree	IP44
Ambient temperature	-10 °C to +50 °C
Marking	CE marking
Max. number of transponder keys or cards	2,000 (not included)
Protection against unauthorized configuration	yes (password)
Technology	MIFARE Classic® 1K / 4K
Configuration	Niko configuration software for access control

Dimensions

