

# Central screen memory

**10-845**

**4** year  
warranty

This central screen memory module is suitable for larger projects and is mounted in the electrical cabinet and can be used in combination with all internal video units. The call images of every individual housing unit are first encrypted and then centrally stored (on a SD card). These images can only be seen from the called internal video unit.


## Technical data

- dimensions: 90 x 105 x 70 mm (HxWxD) (DIN 6U)
- power supply voltage: +24 V  $\pm$  8 %
- input current in standby:  $I(a) = 0.1$  mA,  $I(P) = 106$  mA
- max input current:  $I(P_{max}) = 141$  mA
- input / output impedance: 100  $\Omega$  balanced
- output level video signal: between -11 dB and +5 dB; 0.28-1.82 V<sub>ss</sub>
- marking: CE

- image resolution: 720x576 pixels
- storage of up to 64 images / housing unit
- encryption of images for privacy
- password protection against unauthorized configuration
- up to 32 housing units/central screen memory
- possibility to install multiple central screen memories
- configurable with Niko Configuration SW for access control



## Dimensions

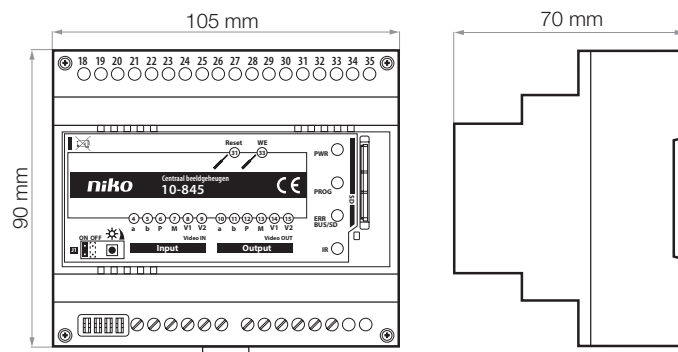

## Wiring diagram

