

Presence detector, DALI, master, 14 m, square, for flush-mounting box, white

351-26003


4 year warranty

Master presence detector for DALI systems (broadcast). daylight control for 1 zone. Easy to start up via app, remote control or controller. Max. 10 secondary detectors are wired by means of a control cable.
Finishing colour: white
Compatible secondary detectors: 351-25459, 351-25469

- Entry-level model
- Very easy to set
- Self-standing and option of secondary master
- Surface-mounting boxes available separately
- To be used as a presence or absence detector



Detection range



| H | A Across | B Towards | C Presence |
|-------|-------------|--------------|---------------|
| 2 m | ø 10 m | ø 5 m | ø 4 m |
| 2.5 m | ø 12 m | ø 6 m | ø 5 m |
| 3 m | ø 14 m | ø 7 m | ø 6 m |
| 3.5 m | ø 16 m | ø 8 m | ø 7 m |
| 4 m | ø 16 m | ø 8 m | ø (8 m) |
| 5 m | ø 16 m | ø 8 m | ø (8 m) |
| 6 m | ø 16 m | ø 8 m | ø (8 m) |



DALI



master



360°



ø 14 m from
a height of
3 m



2 – 6 m




flush-
mounting
box

niko

Technical data

| | |
|----------------------------------|---|
| Article number | 351-26003 |
| Compatible secondary detectors | 351-25459, 351-25469 |
| Input voltage | 230 Vac \pm 10 %, 50 Hz |
| Detector output | DALI Broadcast |
| Maximum MCB rating | 10 A (limited by national installation rules) |
| Light intensity range | 5 lux – 2000 lux |
| Maximum number of dimmable zones | 1 |
| Switch-off delay | 10 s – 20 min |
| Detection angle | 360° |
| Detection range (PIR) | ø 14 m from a height of 3 m |
| Ambient temperature | 0 – 45 °C |
| Mounting method | flush-mounting box |
| Mounting height | 2 – 6 m |
| Dimensions visible (HxWxD) | 88 x 88 x 35 mm |
| Dimensions (HxWxD) | 88 x 88 x 71 mm |
| Protection degree | IP20 |
| Impact resistance | IK02 |
| Marking | CE |

Dimensions

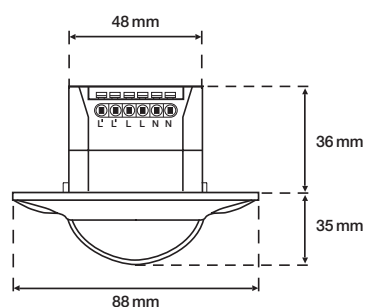

Wiring diagram

