

Presence detector, DALI, master, 14 m, round, for flush-mounting box, white

351-26004


4 year warranty

Master presence detector for DALI systems (broadcast). daylight control for 1 zone. Easy to start up via app, remote control or controller. Max. 10 secondary detectors are wired by means of a control cable.
Finishing colour: white
Compatible secondary detectors: 351-25459, 351-25469

- Entry-level model
- Very easy to set
- Self-standing and option of secondary master
- Surface-mounting boxes available separately
- To be used as a presence or absence detector



Detection range



H	A Across	B Towards	C Presence
2 m	ø 10 m	ø 5 m	ø 4 m
2.5 m	ø 12 m	ø 6 m	ø 5 m
3 m	ø 14 m	ø 7 m	ø 6 m
3.5 m	ø 16 m	ø 8 m	ø 7 m
4 m	ø 16 m	ø 8 m	ø (8 m)
5 m	ø 16 m	ø 8 m	ø (8 m)
6 m	ø 16 m	ø 8 m	ø (8 m)



DALI



master



360°



ø 14 m from
a height of
3 m



2 – 6 m



flush-
mounting
box

niko


Technical data

Article number	351-26004
Compatible secondary detectors	351-25459, 351-25469
Input voltage	230 Vac \pm 10 %, 50 Hz
Detector output	DALI Broadcast
Maximum MCB rating	10 A (limited by national installation rules)
Light intensity range	5 lux – 2000 lux
Maximum number of dimmable zones	1
Switch-off delay	10 s – 20 min
Detection angle	360°
Detection range (PIR)	ø 14 m from a height of 3 m
Ambient temperature	0 – 45 °C
Mounting method	flush-mounting box
Mounting height	2 – 6 m
Dimensions visible (HxWxD)	105 x 105 x 35 mm
Dimensions (HxWxD)	105 x 105 x 71 mm
Protection degree	IP20
Marking	CE

Accessories

351-25420	Surface-mounting box, white
351-25330	Cover plate, white

Dimensions

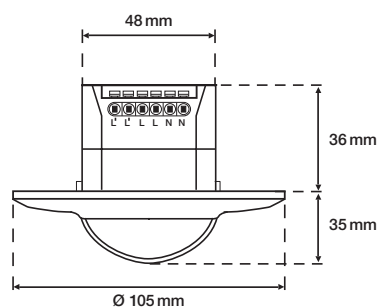

Wiring diagram

