




Two-way control switch with four connection terminals

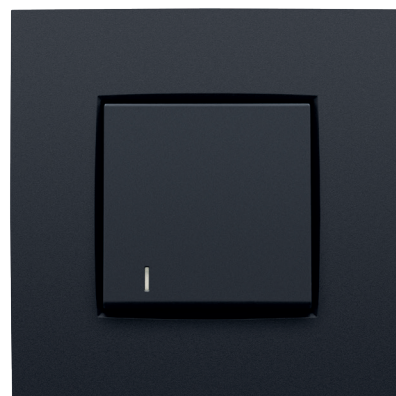

 10 A
250 Vac

Two-way control switch with four connection terminals

10 A
250 Vac



BASE

| | | | |
|------------|------------------|------------|---|
| | 170-07605 | Pieces: 10 | With plug-in terminals and claw fixing |
| | 170-07615 | Pieces: 10 | With plug-in terminals, for screw fixing |
| | 170-07600 | Pieces: 10 | With screw terminals and claws |
| | 170-07601 | Pieces: 10 | With screw terminals, for screw fixing |
| NEW | 170-77605 | Pieces: 10 | With plug-in terminals and claws (centre distance: 71 mm) |
| | 170-77615 | Pieces: 10 | With plug-in terminals, for screw fixing (centre distance: 71 mm) |
| | 170-77600 | Pieces: 10 | With screw terminals and claws (centre distance: 71 mm) |
| | 170-77601 | Pieces: 10 | With screw terminals, for screw fixing (centre distance: 71 mm) |

FINISHING SET WITH SMALL TRANSPARENT WINDOW (SEE ACCESSORIES FOR LED LIGHTING ELEMENTS)

| | | | | | | | | | |
|--|--|------------------|------------|--|------------------|------------|--|------------------|------------|
| | | 100-60005 | Pieces: 20 | | 101-60005 | Pieces: 20 | | 102-60005 | Pieces: 20 |
| | | 104-60005 | Pieces: 20 | | 121-60005 | Pieces: 10 | | 122-60005 | Pieces: 10 |
| | | 123-60005 | Pieces: 10 | | 124-60005 | Pieces: 10 | | 154-60005 | Pieces: 10 |
| | | 157-60005 | Pieces: 10 | | 161-60005 | Pieces: 10 | | 200-60005 | Pieces: 10 |
| | | 220-60005 | Pieces: 10 | | 221-60005 | Pieces: 10 | | | |

COMPLETE UNIT WITH PLUG-IN TERMINALS AND CLAWS

| | | | | | | |
|--|--|------------------|------------|--|------------------|------------|
| | | 100-67608 | Pieces: 10 | | 101-67608 | Pieces: 10 |
|--|--|------------------|------------|--|------------------|------------|



COMPLETE UNIT WITH SCREW TERMINALS AND CLAWS

| | | | | | | |
|--|--|------------------|------------|--|------------------|------------|
| | | 100-67600 | Pieces: 10 | | 101-67600 | Pieces: 10 |
|--|--|------------------|------------|--|------------------|------------|

170-07605

4 year
warranty

Base for two-way control switch with 4 connection terminals,
10 AX/250 Vac, plug-in terminals

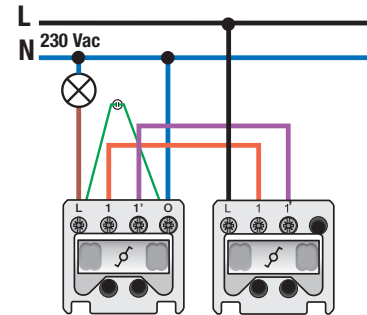

Mechanism for a two-way control switch, with 4 connection terminals, with claw fixing. Two-way switches are used to operate one lamp from two different locations. This switch is equipped with an indicator lamp which indicates whether the light is switched on or not. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, plug-in terminals. The switch is equipped with block-shaped, silver contacts (cadmium-free) in the form of a cross. The sockets are equipped with plug-in terminals for clamping the wires. All connection terminals are located at the top of the end socket and can contain up to $2 \times 2.5 \text{ mm}^2$ of wire. The stripping length (12 mm) of the wires and the wiring diagram are indelibly indicated at the back of the base. The terminals and the switch symbol are indelibly indicated at the front. At the bottom, the base is equipped with rectangular recesses for integration of a lighting element. A lighting element with wires or an automatic lighting unit can be clicked in the left recess (front view). At the back, the base is equipped with round recesses that ensure that the automatic lighting element makes direct contact with the mechanism when being clicked in and, in this way, is immediately connected.

When mounting the socket outlet in a flush-mounting box with grip surfaces, use claws that can be rotated open using screws with a combination screwhead (Pz1 or slot $1 \times 5 \text{ mm}$). The claws, which have a depth of engagement of 31 mm, can be manually pushed back into their original position after unscrewing. These claws can also be easily pushed out using a screwdriver. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of $60 \times 71 \text{ mm}$ by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed. The 4 rectangular openings ($7 \times 2.5 \text{ mm}$) in the flush-mounting frame can compensate for a margin of 1 to 1.2 mm if the flush-mounting box protrudes beyond the plasterwork. In the case of such a margin, the flush surround plate can still butt up perfectly against the wall.

- Protection degree: The combination of a switch, a central plate and a flush surround plate has a protection degree of IP41.
- Flush-mounting depth: 18 mm
- Certification marks: CEBEC, NF
- Marking: CE



10 A
250 Vac



170-07615

4 year warranty

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, plug-in terminals

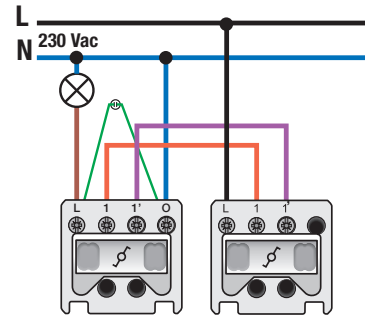

Mechanism for a two-way control switch, with 4 connection terminals, with screw fixing. Two-way switches are used to operate one lamp from two different locations. This switch is equipped with an indicator lamp which indicates whether the light is switched on or not. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, plug-in terminals. The switch is equipped with block-shaped, silver contacts (cadmium-free) in the form of a cross. The sockets are equipped with plug-in terminals for clamping the wires. All connection terminals are located at the top of the end socket and can contain up to $2 \times 2.5 \text{ mm}^2$ of wire. The stripping length (12 mm) of the wires and the wiring diagram are indelibly indicated at the back of the base. The terminals and the switch symbol are indelibly indicated at the front. At the bottom, the base is equipped with rectangular recesses for integration of a lighting element. A lighting element with wires or an automatic lighting unit can be clicked in the left recess (front view). At the back, the base is equipped with round recesses that ensure that the automatic lighting element makes direct contact with the mechanism when being clicked in and, in this way, is immediately connected.

When fixing in a flush-mounting box screws should be used. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of $60 \times 71 \text{ mm}$ by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed. The 4 rectangular openings ($7 \times 2.5 \text{ mm}$) in the flush-mounting frame can compensate for a margin of 1 to 1.2 mm if the flush-mounting box protrudes beyond the plasterwork. In the case of such a margin, the flush surround plate can still butt up perfectly against the wall.

- Protection degree: The combination of a switch, a central plate and a flush surround plate has a protection degree of IP41.
- Flush-mounting depth: 18 mm
- Certification marks: CEBEC, NF
- Marking: CE



10 A
250 Vac



170-07600

4 year warranty

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, screw terminals

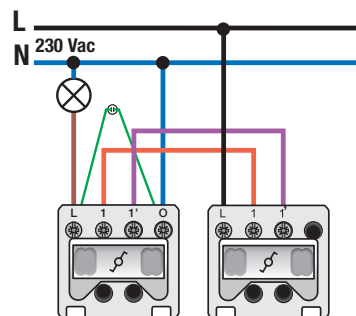

Mechanism for a two-way control switch, with 4 connection terminals, with claw fixing. Two-way switches are used to operate one lamp from two different locations. This switch is equipped with an indicator lamp which indicates whether the light is switched on or not. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, screw terminals. The switch is equipped with block-shaped, silver contacts (cadmium-free) in the form of a cross. The sockets are fitted with cage clamps with permanent screws. These screws have combination screwheads (Pz1 or slot 1 x 5 mm). Moreover, every screw is provided with a screwdriver slot that prevents the screwdriver from sliding off the screwhead. All connection terminals are located at the top of the end socket and can contain up to 2 x 2.5 mm² of wire. The stripping length (8 mm) of the wires and the wiring diagram are indelibly indicated at the back of the base. The terminals and the switch symbol are indelibly indicated at the front. At the bottom, the base is equipped with rectangular recesses for integration of a lighting element. A lighting element with wires or an automatic lighting unit can be clicked in the left recess (front view). At the back, the base is equipped with round recesses that ensure that the automatic lighting element makes direct contact with the mechanism when being clicked in and, in this way, is immediately connected.

When mounting the socket outlet in a flush-mounting box with grip surfaces, use claws that can be rotated open using screws with a combination screwhead (Pz1 or slot 1 x 5 mm). The claws, which have a depth of engagement of 31 mm, can be manually pushed back into their original position after unscrewing. These claws can also be easily pushed out using a screwdriver. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of 60 x 71 mm by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed. The 4 rectangular openings (7 x 2.5 mm) in the flush-mounting frame can compensate for a margin of 1 to 1.2 mm if the flush-mounting box protrudes beyond the plasterwork. In the case of such a margin, the flush surround plate can still butt up perfectly against the wall.

- Protection degree: The combination of a switch, a central plate and a flush surround plate has a protection degree of IP41.
- Flush-mounting depth: 18 mm
- Certification marks: CEBEC, NF
- Marking: CE



10 A
250 Vac



170-07601

4 year warranty

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, screw terminals

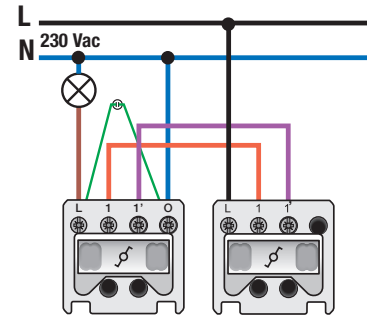

Mechanism for a two-way control switch, with 4 connection terminals, with screw fixing. Two-way switches are used to operate one lamp from two different locations. This switch is equipped with an indicator lamp which indicates whether the light is switched on or not. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, screw terminals. The switch is equipped with block-shaped, silver contacts (cadmium-free) in the form of a cross. The sockets are fitted with cage clamps with permanent screws. These screws have combination screwheads (Pz1 or slot 1 x 5 mm). Moreover, every screw is provided with a screwdriver slot that prevents the screwdriver from sliding off the screwhead. All connection terminals are located at the top of the end socket and can contain up to 2 x 2.5 mm² of wire. The stripping length (8 mm) of the wires and the wiring diagram are indelibly indicated at the back of the base. The terminals and the switch symbol are indelibly indicated at the front. At the bottom, the base is equipped with rectangular recesses for integration of a lighting element. A lighting element with wires or an automatic lighting unit can be clicked in the left recess (front view). At the back, the base is equipped with round recesses that ensure that the automatic lighting element makes direct contact with the mechanism when being clicked in and, in this way, is immediately connected.

When fixing in a flush-mounting box screws should be used. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of 60 x 71 mm by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed. The 4 rectangular openings (7 x 2.5 mm) in the flush-mounting frame can compensate for a margin of 1 to 1.2 mm if the flush-mounting box protrudes beyond the plasterwork. In the case of such a margin, the flush surround plate can still butt up perfectly against the wall.

- Protection degree: The combination of a switch, a central plate and a flush surround plate has a protection degree of IP41.
- Flush-mounting depth: 18 mm
- Certification marks: CEBEC, NF
- Marking: CE



10 A
250 Vac



170-77605

4 year warranty

Base for two-way control switch with 4 connection terminals,
10 AX/250 Vac, plug-in terminals

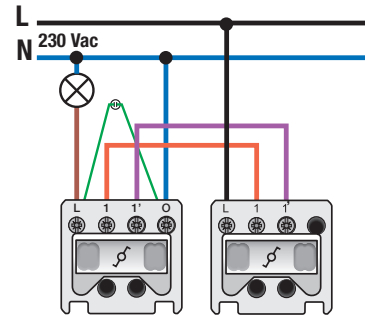


Mechanism for a two-way control switch, with 4 connection terminals, with claw fixing. Two-way switches are used to operate one lamp from two different locations. This switch is equipped with an indicator lamp which indicates whether the light is switched on or not. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, plug-in terminals. The switch is equipped with block-shaped, silver contacts (cadmium-free) in the form of a cross. The sockets are equipped with plug-in terminals for clamping the wires. All connection terminals are located at the top of the end socket and can contain up to $2 \times 2.5 \text{ mm}^2$ of wire. The stripping length (8 mm) of the wires and the wiring diagram are indelibly indicated at the back of the base. The terminals and the switch symbol are indelibly indicated at the front. At the bottom, the base is equipped with rectangular recesses for integration of a lighting element. A lighting element with wires or an automatic lighting unit can be clicked in the left recess (front view). At the back, the base is equipped with round recesses that ensure that the automatic lighting element makes direct contact with the mechanism when being clicked in and, in this way, is immediately connected.

When mounting the socket outlet in a flush-mounting box with grip surfaces, use claws that can be rotated open using screws with a combination screwhead (Pz1 or slot 1 x 5 mm). The claws, which have a depth of engagement of 31 mm, can be manually pushed back into their original position after unscrewing. These claws can also be easily pushed out using a screwdriver. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. The base is equipped on all sides with folded-up dovetails, allowing for both vertical and horizontal coupling (centre-to-centre distance of $71 \times 71 \text{ mm}$) of several bases to be carried out quickly and perfectly. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The 4 rectangular openings ($7 \times 2.5 \text{ mm}$) in the flush-mounting frame can compensate for a margin of 1 to 1.2 mm if the flush-mounting box protrudes beyond the plasterwork. In the case of such a margin, the flush surround plate can still butt up perfectly against the wall.



- Protection degree: The combination of a switch, a central plate and a flush surround plate has a protection degree of IP41.
- Flush-mounting depth: 18 mm
- Certification marks: CEBEC, ÖVE, KEMA, VDE, NF, SEMKO
- Marking: CE



170-77615

4 year warranty

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, plug-in terminals

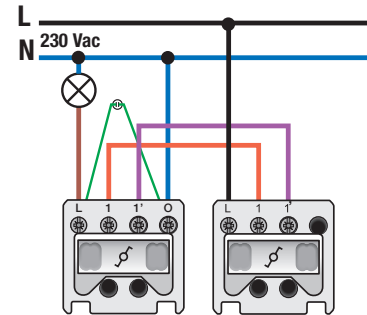


Mechanism for a two-way control switch, with 4 connection terminals, with screw fixing. Two-way switches are used to operate one lamp from two different locations. This switch is equipped with an indicator lamp which indicates whether the light is switched on or not. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, plug-in terminals. The switch is equipped with block-shaped, silver contacts (cadmium-free) in the form of a cross. The sockets are equipped with plug-in terminals for clamping the wires. All connection terminals are located at the top of the end socket and can contain up to $2 \times 2.5 \text{ mm}^2$ of wire. The stripping length (8 mm) of the wires and the wiring diagram are indelibly indicated at the back of the base. The terminals and the switch symbol are indelibly indicated at the front. At the bottom, the base is equipped with rectangular recesses for integration of a lighting element. A lighting element with wires or an automatic lighting unit can be clicked in the left recess (front view). At the back, the base is equipped with round recesses that ensure that the automatic lighting element makes direct contact with the mechanism when being clicked in and, in this way, is immediately connected.

When fixing in a flush-mounting box screws should be used. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. The base is equipped on all sides with folded-up dovetails, allowing for both vertical and horizontal coupling (centre-to-centre distance of $71 \times 71 \text{ mm}$) of several bases to be carried out quickly and perfectly. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The 4 rectangular openings ($7 \times 2.5 \text{ mm}$) in the flush-mounting frame can compensate for a margin of 1 to 1.2 mm if the flush-mounting box protrudes beyond the plasterwork. In the case of such a margin, the flush surround plate can still butt up perfectly against the wall.



- Protection degree: The combination of a switch, a central plate and a flush surround plate has a protection degree of IP41.
- Flush-mounting depth: 18 mm
- Certification marks: CEBEC, ÖVE, KEMA, VDE, NF, SEMKO
- Marking: CE



170-77600

4 year warranty

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, screw terminals

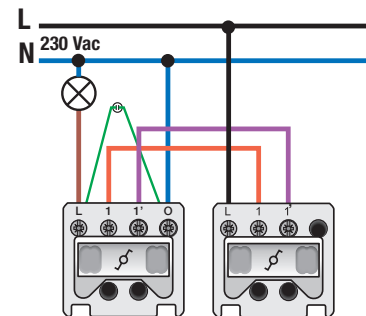


Mechanism for a two-way control switch, with 4 connection terminals, with claw fixing. Two-way switches are used to operate one lamp from two different locations. This switch is equipped with an indicator lamp which indicates whether the light is switched on or not. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, screw terminals. The switch is equipped with block-shaped, silver contacts (cadmium-free) in the form of a cross. The sockets are fitted with cage clamps with permanent screws. These screws have combination screwheads (Pz1 or slot 1 x 5 mm). Moreover, every screw is provided with a screwdriver slot that prevents the screwdriver from sliding off the screwhead. All connection terminals are located at the top of the end socket and can contain up to 2 x 2.5 mm² of wire. The stripping length (8 mm) of the wires and the wiring diagram are indelibly indicated at the back of the base. The terminals and the switch symbol are indelibly indicated at the front. At the bottom, the base is equipped with rectangular recesses for integration of a lighting element. A lighting element with wires or an automatic lighting unit can be clicked in the left recess (front view). At the back, the base is equipped with round recesses that ensure that the automatic lighting element makes direct contact with the mechanism when being clicked in and, in this way, is immediately connected.

When mounting the socket outlet in a flush-mounting box with grip surfaces, use claws that can be rotated open using screws with a combination screwhead (Pz1 or slot 1 x 5 mm). The claws, which have a depth of engagement of 31 mm, can be manually pushed back into their original position after unscrewing. These claws can also be easily pushed out using a screwdriver. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. The base is equipped on all sides with folded-up dovetails, allowing for both vertical and horizontal coupling (centre-to-centre distance of 71 x 71 mm) of several bases to be carried out quickly and perfectly. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The 4 rectangular openings (7 x 2.5 mm) in the flush-mounting frame can compensate for a margin of 1 to 1.2 mm if the flush-mounting box protrudes beyond the plasterwork. In the case of such a margin, the flush surround plate can still butt up perfectly against the wall.



- Protection degree: The combination of a switch, a central plate and a flush surround plate has a protection degree of IP41.
- Flush-mounting depth: 18 mm
- Certification marks: CEBEC, ÖVE, KEMA, VDE, NF, SEMKO
- Marking: CE



170-77601

4 year
warranty

Base for two-way control switch with 4 connection terminals,
10 AX/250 Vac, screw terminals

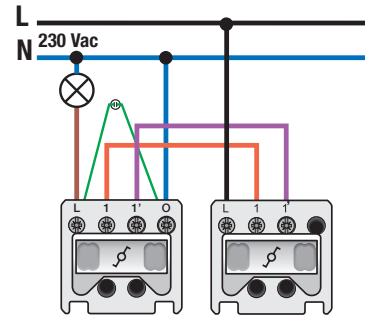

Mechanism for a two-way control switch, with 4 connection terminals, with screw fixing. Two-way switches are used to operate one lamp from two different locations. This switch is equipped with an indicator lamp which indicates whether the light is switched on or not. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Base for two-way control switch with 4 connection terminals, 10 AX/250 Vac, screw terminals. The switch is equipped with block-shaped, silver contacts (cadmium-free) in the form of a cross. The sockets are fitted with cage clamps with permanent screws. These screws have combination screwheads (Pz1 or slot 1 x 5 mm). Moreover, every screw is provided with a screwdriver slot that prevents the screwdriver from sliding off the screwhead. All connection terminals are located at the top of the end socket and can contain up to 2 x 2.5 mm² of wire. The stripping length (8 mm) of the wires and the wiring diagram are indelibly indicated at the back of the base. The terminals and the switch symbol are indelibly indicated at the front. At the bottom, the base is equipped with rectangular recesses for integration of a lighting element. A lighting element with wires or an automatic lighting unit can be clicked in the left recess (front view). At the back, the base is equipped with round recesses that ensure that the automatic lighting element makes direct contact with the mechanism when being clicked in and, in this way, is immediately connected.

When fixing in a flush-mounting box screws should be used. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. The base is equipped on all sides with folded-up dovetails, allowing for both vertical and horizontal coupling (centre-to-centre distance of 71 x 71 mm) of several bases to be carried out quickly and perfectly. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The 4 rectangular openings (7 x 2.5 mm) in the flush-mounting frame can compensate for a margin of 1 to 1.2 mm if the flush-mounting box protrudes beyond the plasterwork. In the case of such a margin, the flush surround plate can still butt up perfectly against the wall.

- Protection degree: The combination of a switch, a central plate and a flush surround plate has a protection degree of IP41.
- Flush-mounting depth: 18 mm
- Certification marks: CEBEC, ÖVE, KEMA, VDE, NF, SEMKO
- Marking: CE

