

Motion detector, 230 V, 26 m, round, for flush-mounting box

351-25065

4 year warranty

The motion detector with one channel for flush-mounting in ceilings is suitable for switching indoor lighting on and off. You can always activate the light with a N.O. push button (230 Vac) (to be ordered separately). The detector is equipped with an integrated light sensor.
Finishing colour: white


- The presence detector for each large room
- Can be placed at a height of up to 8 metres
- Separate setting for the lux, the switch-off delay and the sensitivity
- Low consumption (0.25 W)
- Surface-mounting boxes available separately

The motion detector for large meeting rooms, hangars, etc.

- The lighting remains on while there is motion
- You can programme it manually or using the optional remote control
- You can always be certain of excellent detection thanks to the three PIR sensors.



Detection range



H	A Across	B Towards
2 m	∅ 20 m	∅ 10 m
3 m	∅ 26 m	∅ 13 m
4 m	∅ 28 m	∅ 14 m
5 m	∅ 30 m	∅ 15 m
6 m	∅ 30 m	∅ 15 m
7 m	∅ 30 m	∅ 15 m
8 m	∅ 30 m	∅ 15 m



niko


Technical data

Article number	351-25065
Configuration	stand-alone
Input voltage	230 Vac \pm 10 %, 50 Hz
Detector output	230 V (ON/OFF)
Maximum power consumption	0.9 W
Maximum current consumption	3.91 mA
Maximum MCB rating	10 A (limited by national installation rules)
Relay contact	N.O. (max. 10 A)
Maximum load incandescent and halogen lamps ($\cos\phi = 1$)	2300 W
Maximum load fluorescent lamps ($\cos\phi \geq 0.5$)	1150 VA
Maximum load economy lamps (CFLi)	350 W
Maximum load LED lamps 230 V	350 W
Maximum load LED driver	350 VA
Maximum load electronic transformer	1150 VA
Light intensity range	5 lux – 2000 lux
Number of channels	1 channel
Switch-off delay	pulse, 10 s – 20 min
Detection angle	360°
Detection range (PIR)	ø 26 m from a height of 3 m
Ambient temperature	-20 – +40 °C
Mounting method	flush-mounting box
Mounting height	2 – 8 m
Dimensions visible (HxWxD)	105 x 105 x 43 mm
Dimensions (HxWxD)	105 x 105 x 79 mm
Protection degree	IP20
Impact resistance	IK02
Modification of settings	Potentiometers or IR remote control
Marking	CE

Accessories

350-41936	Universal remote control for smartphone
351-25320	IR remote control
351-25310	IR remote control for users
351-25420	Surface-mounting box, white

Dimensions

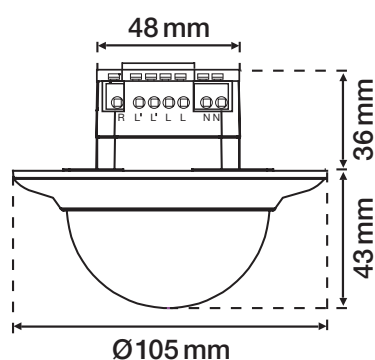

Wiring diagram

