

Presence or absence detector PIR 360°, 230 V, 24 m, 10 A, secondary, for flush-mounting. (white)



350-20071

4 year warranty

This presence or absence detector (360°, secondary) is suitable for flush mounting in ceilings and is used to switch indoor lighting on and off but only in combination with the master (350-20070). The detector has a circular detection area with a diameter of up to 24 m that can be adjusted using the cover mask. The device follows the settings of the master. The sensitivity of the secondary detector, though, can be set separately. This motion detector has an IP54 protection degree and complies with the European directives for EMC and safety, EN 60669-2-1. A maximum of ten secondary detectors can be connected per master. Finishing colour: white.



Detection range

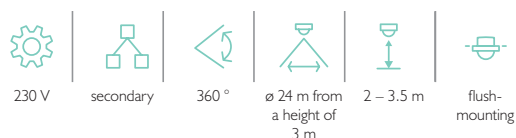

| Height | Sitting | Standing | Walking |
|--------|---------|----------|---------|
| 2 m | 4 m | 10 m | 16 m |
| 2,5 m | 5 m | 12 m | 20 m |
| 3 m | 6 m | 14 m | 24 m |


Technical data

| | |
|----------------------------|-----------------------------|
| Article number | 350-20071 |
| Input voltage | 230 Vac \pm 10 %, 50 Hz |
| Detector output | 230 V (ON/OFF) |
| Detection angle | 360 ° |
| Detection range (PIR) | ø 24 m from a height of 3 m |
| Ambient temperature | -5 – +50 °C |
| Mounting method | flush-mounting |
| Mounting height | 2 – 3.5 m |
| Dimensions visible (HxWxD) | 100 x 100 x 46.4 mm |
| Dimensions (HxWxD) | 100 x 100 x 83.4 mm |
| Wire capacity | NA |
| Marking | CE |

Accessories

| | |
|-----------|--|
| 390-20057 | Flush-mounting box with spring clips for 350-20065 and 351-20066 |
|-----------|--|

Dimensions

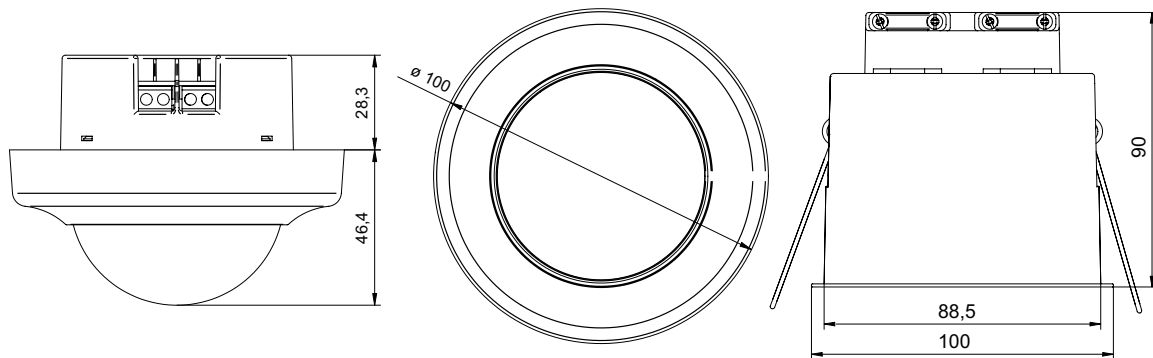

Wiring diagram

