


Outdoor motion detector, KNX, 360°, 16 m, for surface mounting

350-213001

The outdoor motion detector with two channels is suitable for KNX systems. It can be surface mounted on walls or ceilings and is easy to install thanks to the plug-in terminals. The detector can also be used for indoor applications. In conformity with the European directive for EMC and safety EN 60669-2-1.

- KNX motion detector for outdoor use
- Also suitable for indoor daylight control, HVAC and alarm functionalities
- Wall or ceiling mounting
- Corner mounting bracket (available as accessory)
- Easy installation with plug-in terminals
- Adjustable sensor head - right/left 90°, up 90°, down 40°
- Two sensitivity zones: frontal and below
- Pulse algorithm prevents false triggering by trees or other objects
- Master/slave configuration or stand-alone
- 2 channels for on/off or dimming
- 2 channels for HVAC
- 1 channel for alarm
- Two separate light levels (orientation light level and normal light level)
- Commissioning via ETS software or IR-remote control (available as accessory)

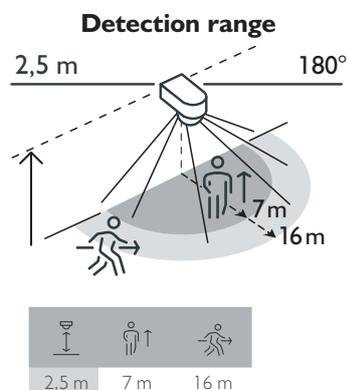

Technical data


4 year warranty

Article number	350-213001
Input voltage	30 Vdc via KNX-bus
Light intensity range	5 lux – 2000 lux, ∞
Number of channels	5 channels
Switch-off delay	5 s – 1 h
Detection angle	360°
Detection range (PIR)	up to 16 m in diameter from a height of 2,5 m
Ambient temperature	-20 – +50 °C
Mounting method	surface mounting
Mounting height	2 – 3 m
Colour	white (RAL 9010)
Dimensions visible (HxWxD)	79 x 90 x 150 mm
Dimensions (HxWxD)	79 x 90 x 150 mm
Wire capacity	∅ 0.8 mm
Protection degree	IP55


Accessories

350-993991	Corner-mounting bracket for 350-213001
350-999908	IR remote control for 350-213001

Dimensions

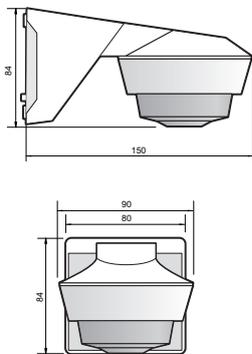


Wiring diagram



350-999908

4 year warranty

IR remote control for 350-213001

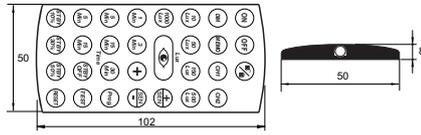

350-993991

Corner-mounting bracket for 350-213001

4 year warranty

