

# TYTAN® T Gruppeafbryder, 3 pol. med hjælpekontakt

**961-0280300**

DK typenummer: 61-028

E-Nr.: 3418551148

**4** års  
garanti

- Indbyggede skuffer
- Bredde: 72 mm
- Sikringsskuffer fra 2-63A
- Temperatuervågning
- Blinkmelder på gruppeafbryderen
- 1,5-25 mm<sup>2</sup> kabel CU
- Kortslutningsholdbarhed: max. 50 kA
- Synlig visning af kontaktstilling

Kompakt gruppeafbryder med indbygget blinkmelder for hurtigt overblik, samt termoafbryder som kobler ud ved overophedning. Denne gruppeafbryder har indbyggede sikringsskuffer. Husk at tilkøbe sikringer og pasringe.



- Thermal control: the thermal control auxiliary switch is activated by dangerous overheating.
- Flashing indicator: the optical-electronic fuse disconnection indicator enables local, reliable fault identification and immediate reconnection.
- Independent manual exertion: when activated, the all-pole disconnection ensures personnel and plant safety.
- Fuse switch: plug-in technique without screw caps and hand independent permanent contact pressure ensures plant safety and energy economy. The interchangeable fuse switch is an optimal finger protection against burns (A fuse can be > 100 °C hot when being replaced)
- Compact form: with only 4 separate sections, it fits standard distribution panels, 1 apparat more per section, compatible with RCD switches.

## Tekniske data


TYTAN® T Gruppeafbryder, 3 pol. med hjælpekontakt.

- DIN dimensioner: 4E
- Dimensioner (HxBxD): 72 mm
- Godkendelse: CE



**niko**

# Dimensioner

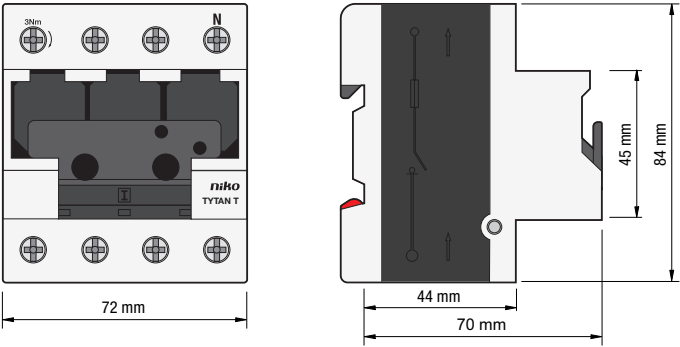

# Tilslutningsskema

