

# Flat presence or absence detector 360°, 12 m, with 3 zone DALI daylight control, master, for flush mounting (white)

**350-41657**


4 year warranty

Presence detector, DALI daylight control for flush-mounting in ceilings of 2.4 - 3 m. Standalone or as master combinable with a maximum of 10 secondary detectors (350-41659). For use in offices, schools, conference rooms... in large and small spaces. The detector has a maximum of 3 daylight controlled zones and has a very flat design of only 5 mm, so that it can be mounted almost flush with the ceiling. Depending on the chosen application the lighting must always be switched on manually using a push button, and is automatically switched off if there is sufficient daylight or no one is in the room (absence detector). Or the lighting is switched on automatically when movement is registered and there is insufficient daylight. In this case, the lighting is also automatically switched off if there is sufficient daylight or no one is in the room (presence detector). The lighting remains on as long as the detector detects movement and the measured level of daylight is lower than the set value. The switch-off delay, the lux value at which the lighting must switch on and the sensitivity of the detector can easily set with the IR remote control (optional).

Finishing colour: white



## Detection range



2.5 m	3 m	4 m	8 m
3 m	4 m	6 m	12 m



DALI



master



360 °



ø 12 m from  
a height of  
3 m



2.4 – 3 m



flush-  
mounting


## Technical data

Article number	350-41657
Input voltage	230 Vac $\pm$ 10 %, 50 Hz
Detector output	DALI
Light intensity range	100 lux – 1000 lux
Switch-off delay	5 min – 1 h, $\infty$
Detection angle	360 °
Detection range (PIR)	$\varnothing$ 12 m from a height of 3 m
Ambient temperature	-5 – +40 °C
Mounting method	flush-mounting
Mounting height	2.4 – 3 m
Drill diameter	77 mm
Dimensions visible (HxWxD)	5 mm
Dimensions (HxWxD)	95 x 95 x 95 mm
Wire capacity	1 x 2.5 mm <sup>2</sup>
Protection degree	IP20
Marking	CE

## Accessories

350-41936	Universal remote control for smartphone
350-41934	IR-remote control for users
350-41935	IR remote control for users

## Dimensions

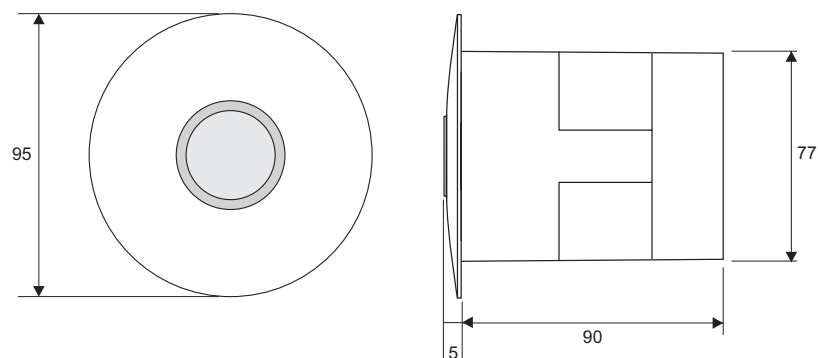

## Wiring diagram

