

# Presence detector, DALI, master, 30 m, square, for flush-mounting box, white

351-26001

4 year warranty

For use in large conference rooms, sheds.

- the detector sends the same DALI command to all luminaires together
- control of a constant light level or orientation lighting
- not compatible with the universal remote control for smartphone
- you only program it with the optional remote control
- built-in DALI power supply up to 100 mA


Finishing colour: white

Compatible secondary detectors: 351-25459, 351-25469



- Entry-level model
- Very easy to set
- The motion detector for each large room
- Can be placed at a height of up to 8 metres
- Self-standing and option of secondary master
- Surface-mounting boxes available separately
- To be used as a presence or absence detector

## Detection range



H	A	B	C
↓	Across	Towards	Presence
	↔	↑	⌂
2 m	∅ 20 m	∅ 10 m	∅ 5 m
3 m	∅ 26 m	∅ 13 m	∅ 7 m
4 m	∅ 28 m	∅ 14 m	∅ 9 m
5 m	∅ 30 m	∅ 15 m	∅ 10 m
6 m	∅ 30 m	∅ 15 m	∅ 10 m
7 m	∅ 30 m	∅ 15 m	∅ 10 m
8 m	∅ 30 m	∅ 15 m	∅ 10 m



DALI



master



360°



∅ 30 m from  
a height of  
8 m



2 – 8 m




flush-  
mounting  
box

**niko**

## Technical data

Article number	351-26001
Compatible secondary detectors	351-25459, 351-25469
Input voltage	230 Vac $\pm$ 10 %, 50 Hz
Detector output	DALI Broadcast
Maximum MCB rating	10 A (limited by national installation rules)
Light intensity range	5 lux – 2000 lux
Maximum number of dimmable zones	1
Switch-off delay	pulse, 10 s – 20 min
Detection angle	360°
Detection range (PIR)	$\varnothing$ 30 m from a height of 8 m
Ambient temperature	0 – 45 °C
Mounting method	flush-mounting box
Mounting height	2 – 8 m
Dimensions visible (HxWxD)	88 x 88 x 50 mm
Dimensions (HxWxD)	88 x 88 x 86 mm
Protection degree	IP20
Marking	CE

## Dimensions

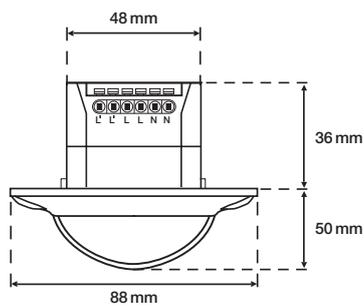

## Wiring diagram

