


Smart double switch with push button and RF extensions, 2 x 10 A

The smart switch has two switching contacts of 10 A each (in total max 16 A) to switch lighting on and off. It has a transmitter and receiver operating according to the Easywave protocol. If desired, extra controls can be added. These could be both classic wired push buttons and wireless controls according to the Easywave protocol. By doing so, it can effortlessly replace any traditional single, multiway, or intermediate switching. This makes the smart switch especially suitable for renovation projects or listed building interiors in which drilling or channelling work should be avoided. Please note, the only condition for the use of the smart switch is the presence of the neutral conductor in the flush-mounting box where the smart switch will be placed.

Besides being able to switch its own contact, the smart switch is also able to switch other receivers operating according to the Easywave protocol.


This function can also be incorporated in a mood setting/preset. In doing so, you can switch all lighting included in the mood setting/preset with one push of the button. It is fitted with a feedback LED of which the behaviour can be adapted to the needs of the user.

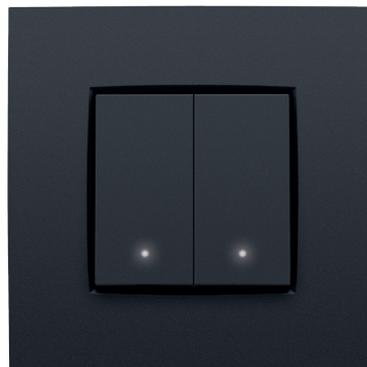

410-00200

4 year warranty

Smart double switch, claw fixing

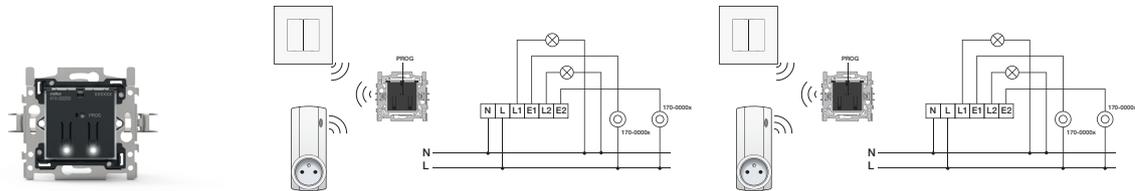

Mechanism for a smart double switch, with claw fixing. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Smart double switch, claw fixing. When mounting the socket outlet in a flush-mounting box with grip surfaces, use claws that can be rotated open using screws with a combination screwhead (Pz2 or slot 1 x 5.5 mm). The claws, which have an engagement depth of 23.5 mm, turn back completely when loosened. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ...) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily. At the right and left sides, the flush-mounting frame is equipped with folded-up dovetails, allowing for a quick and perfect horizontal coupling of several switches. The folded-up edges on the outside of the base and their continuation to the inside ensure additional robustness. The bases can be coupled vertically with a centre-to-centre distance of 60 x 71 mm by sliding them into each other. They automatically lock into place. For horizontal coupling of bases with a centre-to-centre distance of 71 mm, the base is equipped with two pre-formed lips at the bottom. By folding these lips down over a length of 1 mm, this rests perfectly on the one below and the centre-to-centre distance of 71 mm is guaranteed.


- LED colour: white
- Protection degree: IP20
- Flush-mounting depth: 29.5 mm
- Dimensions (HxWxD): 70 x 70 x 42 mm
- Marking: CE



410-00210

4 year warranty

Smart double switch, screw fixing

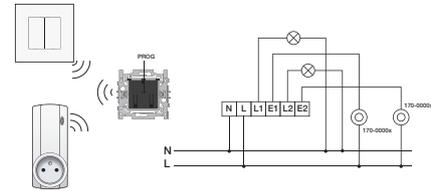

Mechanism for a smart double switch, with screw fixing. A finishing set and flush surround plate in the colour of your choice must be ordered separately.

Smart double switch, screw fixing. When fixing in a flush-mounting box screws should be used. The flush-mounting frame is made from 1 mm-thick metal which is galvanized on all sides after cutting, even on the cut edges. On the horizontal and vertical axes, the flush-mounting frame has 4 grooves for screw mounting in flush-mounting boxes. These grooves have a screw aperture of 7 mm. For mounting on panels, the flush-mounting frame is equipped with 4 screw holes (indicated by a screw symbol) with a diameter of 3 mm. The middle of the flush-mounting frame is indicated (chalk line, laser, ..) in both the horizontal and vertical directions, so that mounting one or more mechanisms can be carried out quickly and easily.

- LED colour: white
- Protection degree: The combination of a switch, a central plate and a flush surround plate has a protection degree of IP41.
- Flush-mounting depth: 29.5 mm
- Dimensions (HxWxD): 712 x 732 x 415 mm
- Marking: CE

