

Detector 360°, 24 m, with 3 zone DALI daylight control and extra functionalities, secondary, for surface mounting, (white)


350-41753

4 year warranty

This presence detector (DALI daylight control, secondary) is suitable for surface-mounting on ceilings with a height of 2.4 – 3 m and can only be used in combination with the master (350-41751) to increase its detection range. The device follows the settings of the master. The sensitivity of the secondary detector, though, can be set separately. A maximum of ten secondary detectors can be connected per master. Finishing colour: white



Detection range



DALI



secondary



360°



ø 24 m from
a height of
3 m



2 – 3.4 m



surface
mounting

Height	Seated	Standing	Moving
2 m	4 m	10 m	16 m
2,5 m	5 m	12 m	20 m
3 m	6 m	14 m	24 m


Technical data

Article number	350-41753
Input voltage	via the DALI bus
Detector output	DALI
Detection angle	360 °
Detection range (PIR)	ø 24 m from a height of 3 m
Ambient temperature	-5 – +50 °C
Mounting method	surface mounting
Mounting height	2 – 3.4 m
Dimensions visible (HxWxD)	459 mm
Dimensions (HxWxD)	117 x 117 x 64.1 mm
Wire capacity	1 x 2.5 mm ²
Marking	CE

Accessories

350-41936	Universal remote control for smartphone
350-41934	IR-remote control for users

Dimensions

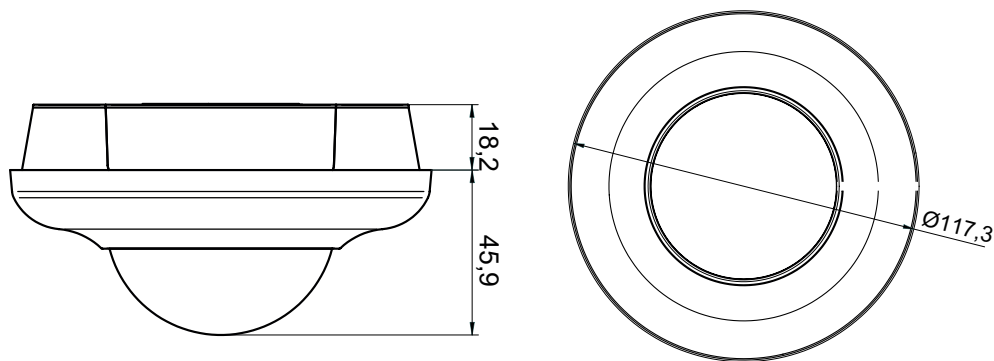

Wiring diagram

