


# Motion detector, Niko Home Control, 8 m, 180°, wall detector, for flush-mounting box


550-20210

4 year warranty


This motion detector is suitable for indoor use and can be used as a motion detector or as a motion detector in combination with a photo cell. With one push of the button, you can also manually switch the light on and off. The motion detector is supplied with power via the Niko Home Control installation.  
This article is protected by at least one patent (application). For more info on patents, see [www.niko.eu/innovation](http://www.niko.eu/innovation).

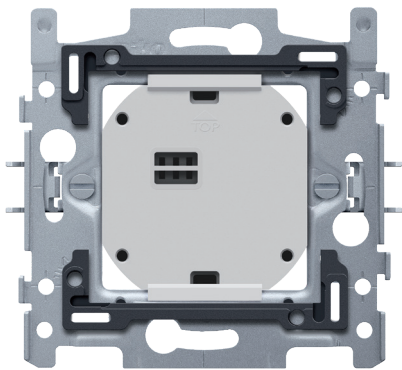


Detection range




H	A Across	B Towards
0.8 m	7 m	2.4 m
1 m	8 m	3 m
1.2 m	9 m	4 m




Niko Home Control




master/  
secondary



8 m from  
a height of  
1 m



0.8 – 1.2 m



flush-  
mounting  
box

**niko**

## Technical data

Article number	550-20210
Configuration	master/secondary
Input voltage	26 Vdc (SELV, safety extra-low voltage)
Detector output	26 V
Light intensity range	10 lux – 1000 lux
Detection range (PIR)	8 m from a height of 1 m
Mounting method	flush-mounting box
Mounting height	0.8 – 1.2 m
Minimum flush-mounting depth	16.2 mm
Dimensions (HxWxD)	71 x 73 x 20.2 mm
Wire capacity	0.5 or 1 mm <sup>2</sup>
Protection degree	IP20
Protection degree	IP40 for the combination of a mechanism and faceplate
Marking	CE